

RoHS

Reach

Ordering Information & Dimension



Circuit No.	Dimensions		
	A	B	C
02P	2.00	8.00	4.60
03P	4.00	10.00	6.60
04P	6.00	12.00	8.60
05P	8.00	14.00	10.60
06P	10.00	16.00	12.60
07P	12.00	18.00	14.60
08P	14.00	20.00	16.60
09P	16.00	22.00	18.60
10P	18.00	24.00	20.60
11P	20.00	26.00	22.60
13P	24.00	30.00	26.60

Explanation of PN.

2003J HM XX - 3 WH

① ② ③ ④ ⑤

- ① Series No.
- ② Connector Type : Male Housing
- ③ Circuits No.
- ④ Insulator Material : Nylon66, UL 94-V0
- ⑤ Color : White

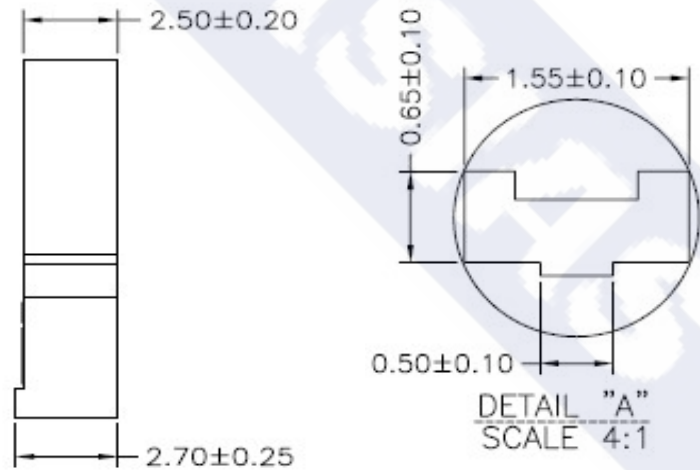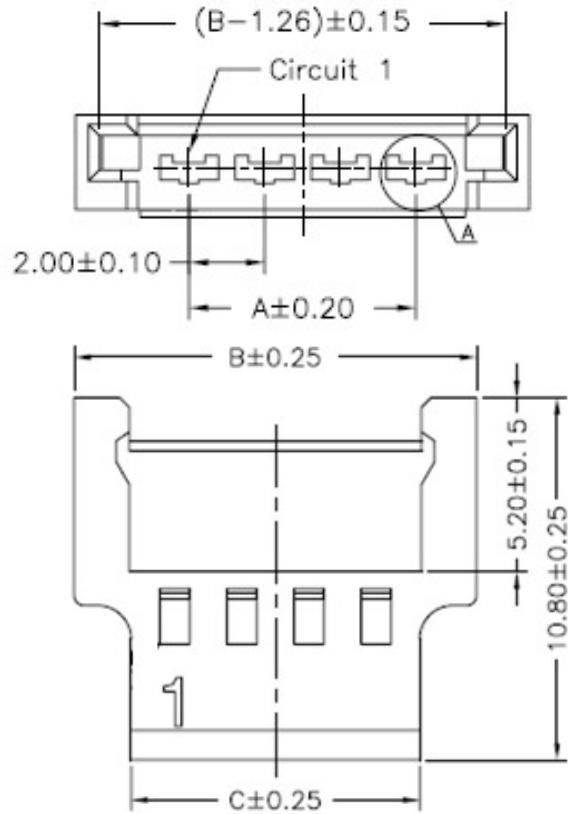

Specification :

- Current Rating : 2A AC,DC
- Voltage Rating : 125V AC,DC
- Temperature Range : -25°C ~ +85°C
- Contact Resistance : 20mΩ Max.
- Insulation Resistance : 1000mΩ Min.
- Withstanding Voltage : 500V AC/minute
- Insulator Material : Nylon66, UL 94-V0



DESCRIPTION :
**2.00mm Pitch, Housing,
Single row, Male Type**

PART NO. :
2003JHMXX-3WH

GENERAL TOLERANCE

X.X ± 0.25
X.XX ± 0.15
X.XXX ± 0.05

SCALE : Free

