
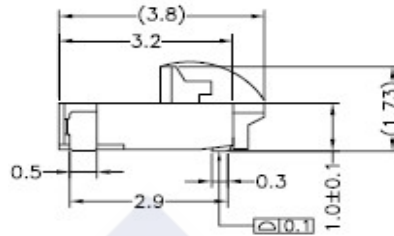




RoHS

Reach

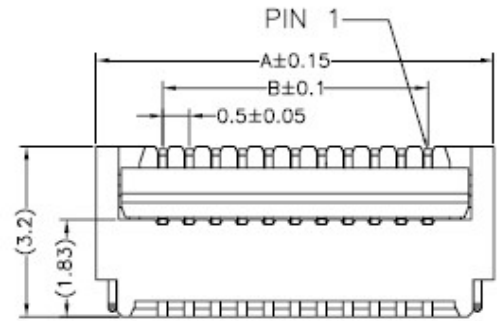

Ordering Information & Dimension

Circuit No.	Dimensions				Circuit No.	Dimensions			
	A	B	C	D		A	B	C	D
04	4.0	1.5	2.53	3.38	28	16.0	13.5	14.57	15.38
05	4.5	2.0	3.03	3.88	29	16.5	14.0	15.07	15.88
06	5.0	2.5	3.53	4.38	30	17.0	14.5	15.57	16.38
07	5.5	3.0	4.03	4.88	31	17.5	15.0	16.07	16.88
08	6.0	3.5	4.53	5.38	32	18.0	15.5	16.57	17.38
09	6.5	4.0	5.03	5.88	33	18.5	16.0	17.07	17.88
10	7.0	4.5	5.53	6.38	34	19.0	16.5	17.57	18.38
11	7.5	5.0	6.03	6.88	35	19.5	17.0	18.07	18.88
12	8.0	5.5	6.53	7.38	36	20.0	17.5	18.57	19.38
13	8.5	6.0	7.03	7.88	37	20.5	18.0	19.07	19.88
14	9.0	6.5	7.53	8.38	38	21.0	18.5	19.57	20.38
15	9.5	7.0	8.03	8.88	39	21.5	19.0	20.07	20.88
16	10.0	7.5	8.53	9.38	40	22.0	19.5	20.57	21.38
17	10.5	8.0	9.03	9.88	41	22.5	20.0	21.07	21.88
18	11.0	8.5	9.53	10.38	42	23.0	20.5	21.57	22.38
19	11.5	9.0	10.03	10.88	43	23.5	21.0	22.07	22.88
20	12.0	9.5	10.53	11.38	44	24.0	21.5	22.57	23.38
21	12.5	10.0	11.03	11.88	45	24.5	22.0	23.07	23.88
22	13.0	10.5	11.53	12.38	46	25.0	22.5	23.57	24.38
23	13.5	11.0	12.03	12.88	47	25.5	23.0	24.07	24.88
24	14.0	11.5	12.53	13.38	48	26.0	23.5	24.57	25.38
25	14.5	12.0	13.03	13.88	49	26.5	24.0	25.07	25.88
26	15.0	12.5	13.53	14.38	50	27.0	24.5	25.57	26.38
27	15.5	13.0	14.03	14.88					

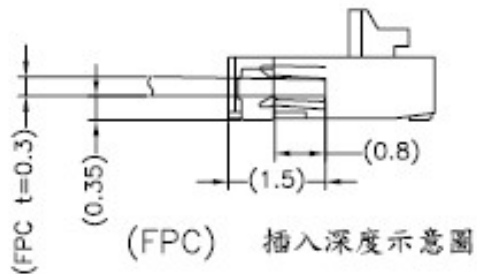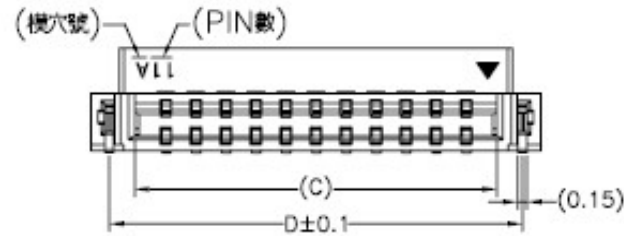

Explanation of PN.

0515J R 2 S XX - 6 NL 2 0

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type : Right Angle
- ③ Option Type : Top and Bottom Contact Type
- ④ Mounting Type : SMD
- ⑤ Circuits No.
- ⑥ Insulator Material : Housing : LCP, UL 94-V0
Actuator : Nylon6T, UL 94-V0
- ⑦ Color : Housing : Natural(Beige)
Actuator : Black
- ⑧ Contact Plating : 2.Gold-flash
- ⑨ Soldering Tab : 0.Matte Tin-plated

Specification :

Current Rating : 0.5A AC,DC

Voltage Rating : 50V AC,DC

Temperature Range : -55°C ~ +85°C

Contact Resistance : 100mΩ Max.

Insulation Resistance : 50mΩ Min.

Withstanding Voltage : 250V AC/minute

Pin Material : Phosphor Bronze

Soldering Tab : Phosphor Bronze

Insulator Material : Housing : LCP, UL 94-V0
Actuator : Nylon6T, UL 94-V0



DESCRIPTION :
0.50mm Pitch,
FPC, ZIF, SMD, Right Angle,
Top/Bottom Contact Type

PART NO. :
0526JR2SXX-6NL20

GENERAL TOLERANCE

X.X ± 0.25
X.XX ± 0.15
X.XXX ± 0.05

SCALE : Free

