

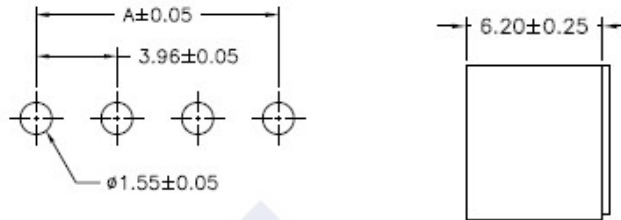


RoHS

Reach

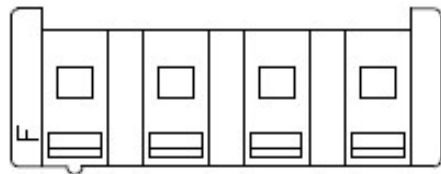

P.C.B. LAYOUT

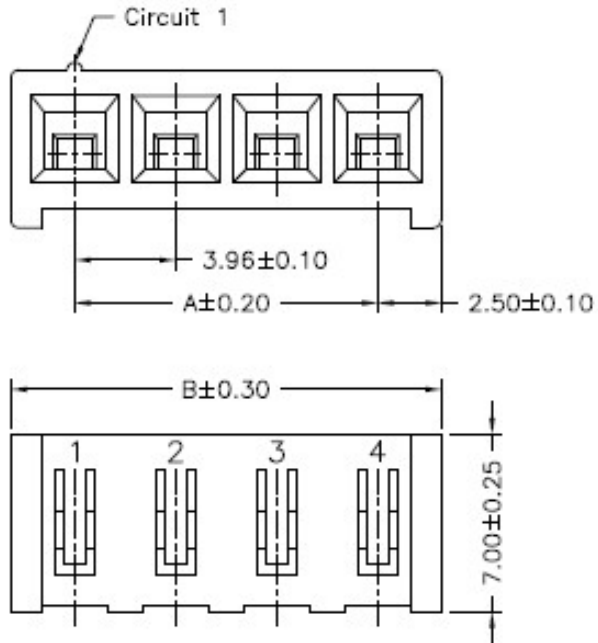

Explanation of PN.

3965J H V XX - 3 WH

① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Connector Type : Housing
- ③ Option Type : **Vertical Type**
- ④ Circuits No.
- ⑤ Insulator Material : 3 : Nylon66, UL 94-V0
- ⑥ Color : WH : White

Ordering Information & Dimension

Circuit No.	Dimensions		Circuit No.	Dimensions	
	A	B		A	B
02P	3.96	8.96	09P	31.68	36.68
03P	7.92	12.92	10P	35.64	40.64
04P	11.88	16.88	11P	39.60	44.60
05P	15.84	20.84	12P	43.56	48.56
06P	19.80	24.80	13P	47.52	52.52
07P	23.76	28.76	14P	51.48	56.48
08P	27.72	32.72	15P	55.44	60.44

Specification :

- Current Rating : 3A AC,DC
- Voltage Rating : 250V AC,DC
- Temperature Range : -25°C ~ +85°C
- Contact Resistance : 10mΩ Max.
- Insulation Resistance : 1000mΩ Min.
- Withstanding Voltage : 800V AC/minute
- Insulator Material : Nylon66, UL 94-V0

	DESCRIPTION : 3.96mm Pitch, Housing, Single row, Vertical Type	GENERAL TOLERANCE	
	PART NO. : 3965JHVXX-3WH	X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05	SCALE : Free