

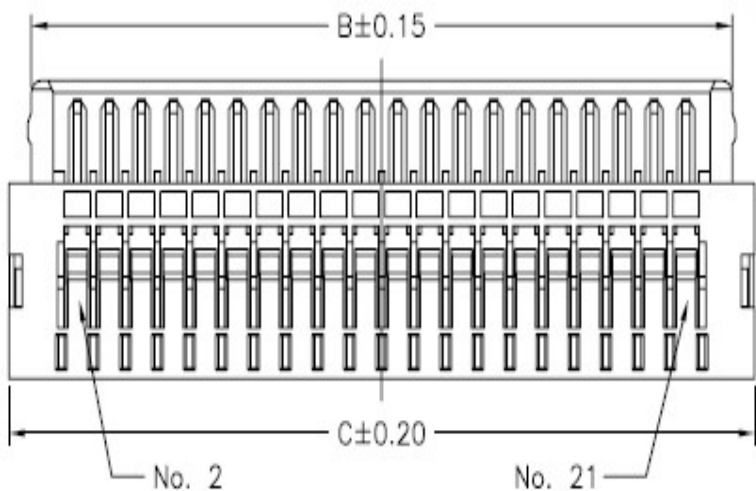


RoHS

Reach

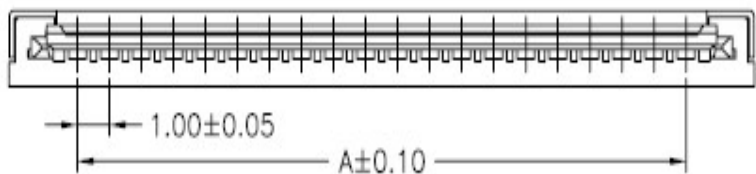

Ordering Information & Dimension

Circuit No.	Dimensions		
	A	B	C
20P	19.00	21.88	23.28
30P	29.00	31.88	33.28

Explanation of PN.

1006J H XX - 0 NL

① ② ③ ④ ⑤

- ① Series No.
- ② Connector Type : Housing
- ③ Circuits No.
- ④ Insulator Material : Nylon46, UL 94-V0
- ⑤ Color : Natural(Beige)

Specification :

- Current Rating : 1A AC,DC
- Voltage Rating : 200V AC,DC
- Temperature Range : -25°C ~ +85°C
- Contact Resistance : 40mΩ Max.
- Insulation Resistance : 100mΩ Min.
- Withstanding Voltage : 500V AC/minute
- Shell : Phosphor Bronze/Nickel-plated
- Insulator Material : Nylon46, UL 94-V0
- Color : Natural(Beige)

	DESCRIPTION : 1.00mm Pitch, Housing, Single Row, Without Protrusions	GENERAL TOLERANCE	
	PART NO. : 1006JHXX-0NL	X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05	SCALE : Free