
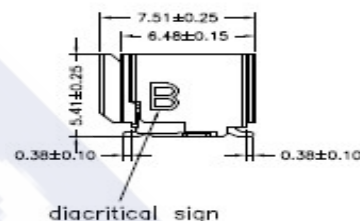

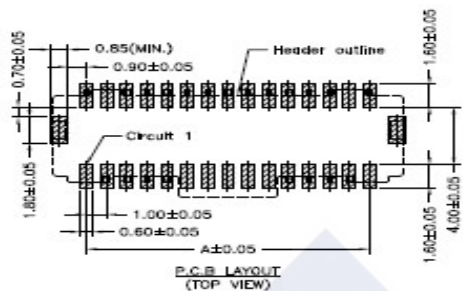
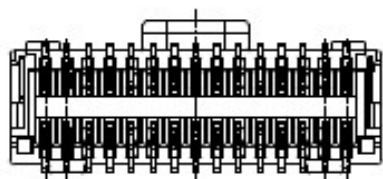
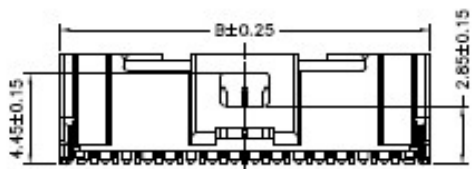
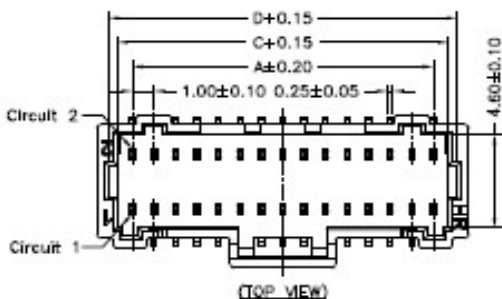


RoHS

Reach

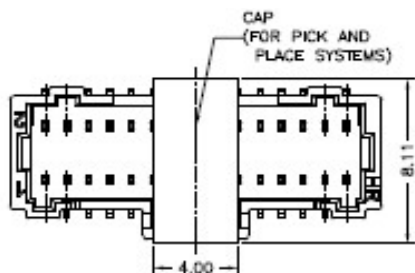

Ordering Information & Dimension

Circuit NO.	10.45Dimensions			
	A	B	C	D
16	7.00	10.30	8.45	9.25
20	9.00	12.30	10.45	11.25
30	14.00	17.30	15.45	16.25
32	15.00	18.30	16.45	17.25
40	19.00	22.30	20.45	21.25
50	24.00	27.30	25.45	26.25

Explanation of PN.


1014J V B D S XX - 4 NL 2 0

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- ① Series No.
- ② Connector Type : Straight Angle
- ③ Option Type : B type
- ④ Row Type : Dual Row
- ⑤ Mounting Type : SMD
- ⑥ Circuits No.
- ⑦ Insulator Material : Nylon6T, UL 94-V0
- ⑧ Color : Natural(Beige)
- ⑨ Contact Plating : 2 : Gold-flash
- ⑩ Soldering Tab : 0 : Matte Tin-plated

Specification :

- Current Rating : 0.8A AC,DC
- Voltage Rating : 50V AC,DC
- Temperature Range : -25°C ~ +85°C
- Contact Resistance : 20mΩ Max.
- Insulation Resistance : 100mΩ Min.
- Withstanding Voltage : 250V AC/minute
- Pin Material : Phosphor Bronze
- Soldering Tab : Brass
- Insulator Material : Housing/Cap : Nylon6T, UL 94-V0
- Color : Natural(Beige)

	DESCRIPTION : 1.00mm Pitch, Receptacle, Dual Row, SMD, Straight Angle, B type	GENERAL TOLERANCE	
	PART NO. : 1014JVBDSXX-4NL20	X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05	SCALE : Free 