


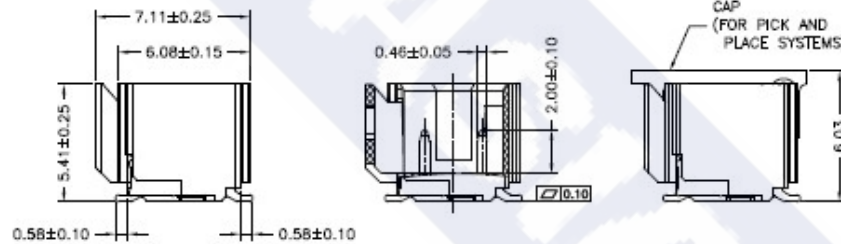
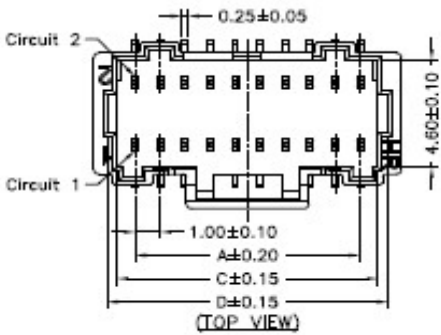

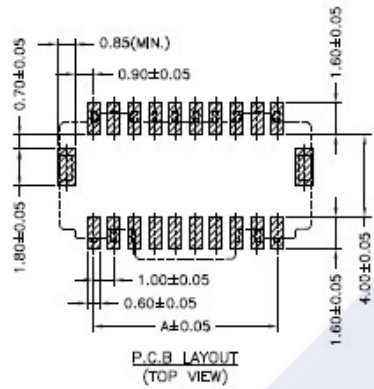


RoHS

Reach

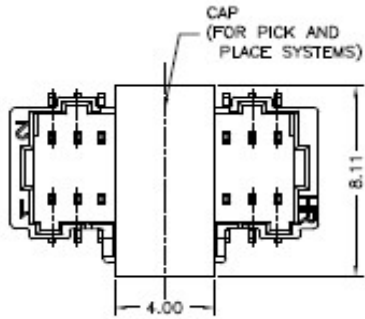

Explanation of PN.

1014J V D S XX - 4 NL 2 0

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type : Straight Angle
- ③ Row Type : Dual Row
- ④ Mounting Type : SMD
- ⑤ Circuits No.
- ⑥ Insulator Material : Nylon6T, UL 94-V0
- ⑦ Color : Natural(Beige)
- ⑧ Contact Plating : 2 : Gold-flash
- ⑨ Soldering Tab : 0 : Matte Tin-plated

Specification :

- Current Rating : 0.8A AC,DC
- Voltage Rating : 50V AC,DC
- Temperature Range : -25°C ~ +85°C
- Contact Resistance : 20mΩ Max.
- Insulation Resistance : 100mΩ Min.
- Withstanding Voltage : 250V AC/minute
- Pin Material : Phosphor Bronze
- Soldering Tab : Brass
- Insulator Material : Housing/Cap : Nylon6T, UL 94-V0
- Color : Natural(Beige)

Ordering Information & Dimension

Circuit NO.	10.45Dimensions			
	A	B	C	D
20	9.00	12.30	10.45	11.25
30	14.00	17.30	15.45	16.25
40	19.00	22.30	20.45	21.25
50	24.00	27.30	25.45	26.25

	<b>DESCRIPTION :</b> 1.00mm Pitch, Receptacle, Dual Row, SMD, Straight Angle	<b>GENERAL TOLERANCE</b>	
	<b>PART NO. :</b> 1014JVDSXX-4NL20	X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05	SCALE : Free  