
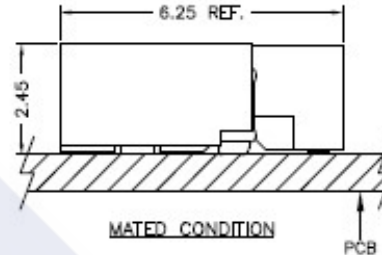
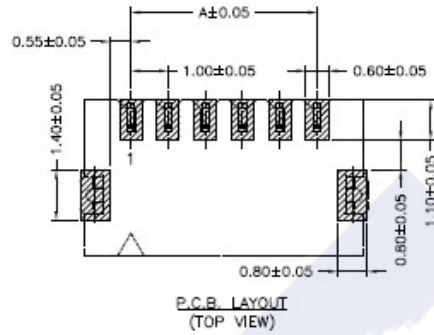


RoHS

Reach

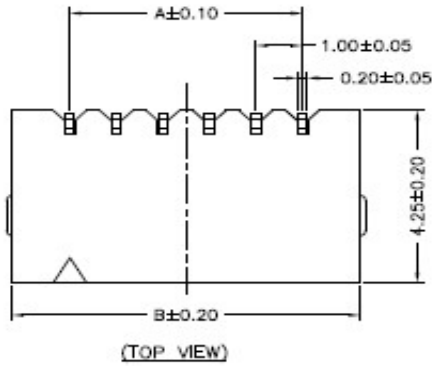

Explanation of PN.

1024J R S XX - 6 NL X X

① ② ③ ④ ⑤ ⑥ ⑦ ⑧




- ① Series No.
- ② Connector Type : Right Angle
- ③ Mounting Type : SMD
- ④ Circuits No.
- ⑤ Insulator Material : LCP, UL 94-V0
- ⑥ Color : Natural(Beige)
- ⑦ Contact Plating : 0.Matte Tin-plated ; 3.Gold-flash
- ⑧ Soldering Tab : 0.Matte Tin-plated ; 3.Gold-flash

Ordering Information & Dimension

Circuit NO.	Dimensions			Circuit NO.	Dimensions		
	A	B	C		A	B	C
02	1.00	3.50	2.50	12	11.00	13.50	12.50
03	2.00	4.50	3.50	13	12.00	14.50	13.50
04	3.00	5.50	4.50	14	13.00	15.50	14.50
05	4.00	6.50	5.50	15	14.00	16.50	15.50
06	5.00	7.50	6.50	16	15.00	17.50	16.50
07	6.00	8.50	7.50	17	16.00	18.50	17.50
08	7.00	9.50	8.50	18	17.00	19.50	18.50
09	8.00	10.50	9.50	19	18.00	20.50	19.50
10	9.00	11.50	10.50	20	19.00	21.50	20.50
11	10.00	12.50	11.50				

Specification :

- Current Rating : 1A AC,DC
- Voltage Rating : 50V AC,DC
- Temperature Range : -25°C ~ +85°C
- Contact Resistance : 20mΩ Max.
- Insulation Resistance : 100mΩ Min.
- Withstanding Voltage : 500V AC/minute
- Pin Material : Phosphor Bronze
- Soldering Tab : Brass
- Insulator Material : LCP, UL 94-V0
- Color : Natural(Beige)

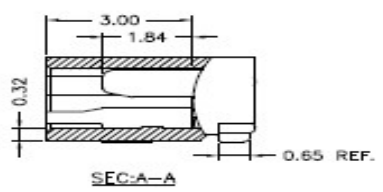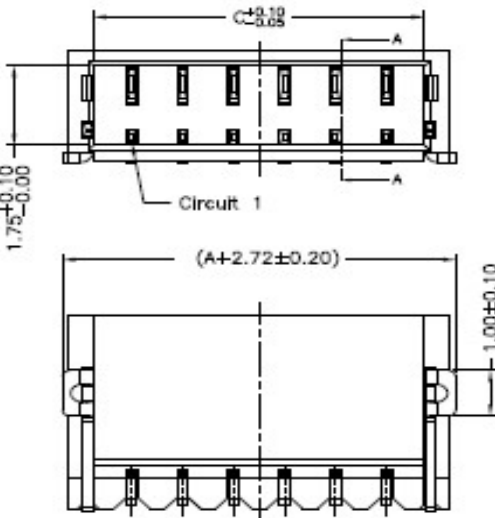

ASIAS TECHNOLOGY CO., LTD.

DESCRIPTION :
 1.00mm Pitch,
 Receptacle, Single Row, SMD,
 Right Angle

PART NO. :
 1024JRSXX-6NLXX

GENERAL TOLERANCE	
X.X ± 0.25	SCALE : Free
X.XX ± 0.15	
X.XXX ± 0.05	