
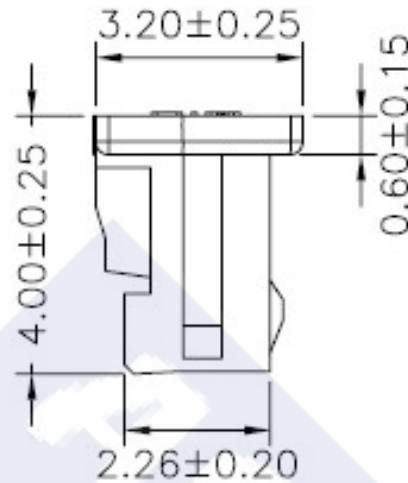
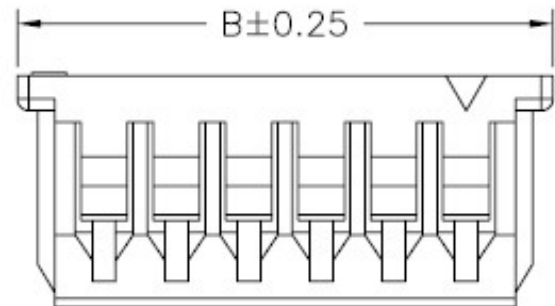


RoHS

Reach

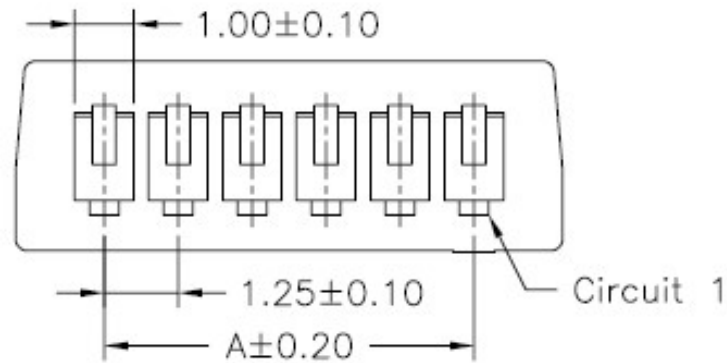

## Ordering Information &amp; Dimension

Circuit No.	Dimensions		Circuit No.	Dimensions	
	A	B		A	B
02P	1.25	4.25	12P	13.75	16.75
03P	2.50	5.50	13P	15.00	18.00
04P	3.75	6.75	14P	16.25	19.25
05P	5.00	8.00	15P	17.50	20.50
06P	6.25	9.25	16P	18.75	21.75
07P	7.50	10.50	17P	20.00	23.00
08P	8.75	11.75	18P	21.25	24.25
09P	10.00	13.00	19P	22.50	25.50
10P	11.25	14.25	20P	23.75	26.75
11P	12.50	15.50			

Explanation of PN.

1250J H XX - 0 XX

① ② ③ ④ ⑤

- ① Series No.
- ② Connector Type : Housing
- ③ Circuits No.
- ④ Insulator Material : PBT, UL 94-V0
- ⑤ Color : WH : White, BK : Black

Specification :

- Current Rating : 1A AC,DC
- Voltage Rating : 125V AC,DC
- Temperature Range :  $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- Contact Resistance : 20m $\Omega$  Max.
- Insulation Resistance : 100m $\Omega$  Min.
- Withstanding Voltage : 500V AC/minute
- Insulator Material : PBT, UL 94-V0

**DESCRIPTION :**  
1.25mm Pitch, Housing,  
Single row,  
Without lock

**PART NO. :**  
1250JHXX-0XX

**GENERAL TOLERANCE**

X.X  $\pm$  0.25  
X.XX  $\pm$  0.15  
X.XXX  $\pm$  0.05

SCALE : Free

