



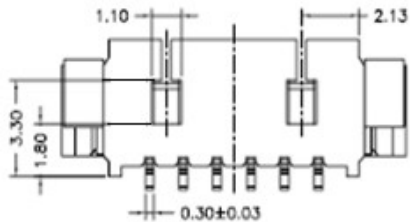
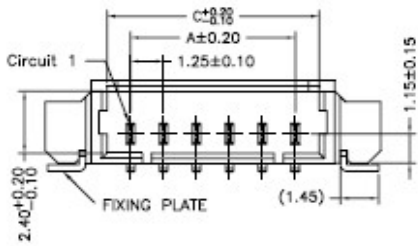



RoHS

Reach

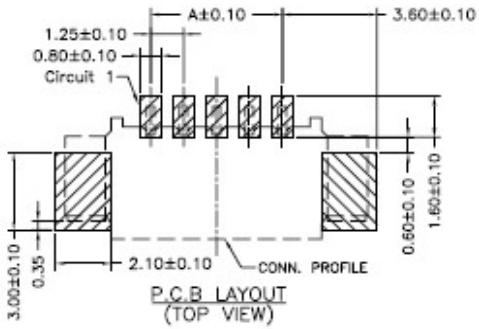

Ordering Information & Dimension

Circuit No.	Dimensions		
	A	B	C
02	1.25	7.75	3.05
03	2.50	9.00	4.30
04	3.75	10.25	5.55
05	5.00	11.50	6.80
06	6.25	12.75	8.05
07	7.50	14.00	9.30
08	8.75	15.25	10.55
09	10.00	16.50	11.80
10	11.25	17.75	13.05
11	12.50	19.00	14.30
12	13.75	20.25	15.55
13	15.00	21.50	16.80
14	16.25	22.75	18.05
15	17.50	24.00	19.30
16	18.75	25.25	20.55
17	20.00	26.50	21.80
18	21.25	27.75	23.05

Explanation of PN.

1250J R A S XX - 4 NL 0 0

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type : Right Angle
- ③ Option Type : A Type
- ④ Mounting Type : SMD
- ⑤ Circuits No.
- ⑥ Insulator Material : Nylon6T, UL 94-V0
- ⑦ Color : Natural(Beige)
- ⑧ Contact Plating : Matte Tin-plated
- ⑨ Soldering Tab : Matte Tin-plated

Specification :

Current Rating : 1A AC,DC

Voltage Rating : 125V AC,DC

Temperature Range : -25°C ~ +85°C

Contact Resistance : 20mΩ Max.

Insulation Resistance : 100mΩ Min.

Withstanding Voltage : 500V AC/minute

Pin Material : Phosphor Bronze

Soldering Tab : Brass

Insulator Material : Nylon6T, UL 94-V0

Color : Natural(Beige)

	DESCRIPTION : 1.25mm Pitch, Receptacle, Single Row, SMD, Right Angle, A Type	GENERAL TOLERANCE	
	PART NO. : 1250JRASXX-4NL00	X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05	SCALE : Free