

RoHS

Reach

Explanation of PN.

**1250J R S XX - 4 NL 0 0**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② Connector Type : Right Angle
- ③ Mounting Type : SMD
- ④ Circuits No.
- ⑤ Insulator Material : Nylon6T, UL 94-V0
- ⑥ Color : Natural(Beige)
- ⑦ Contact Plating : Matte Tin-plated
- ⑧ Soldering Tab : Matte Tin-plated

Specification :

Current Rating : 1A AC,DC

Voltage Rating : 125V AC,DC

Temperature Range : -25°C ~ +85°C

Contact Resistance : 20mΩ Max.

Insulation Resistance : 100mΩ Min.

Withstanding Voltage : 500V AC/minute

Pin Material : Phosphor Bronze








Soldering Tab : Phosphor Bronze

Insulator Material : Nylon6T, UL 94-V0

Color : Natural(Beige)

Ordering Information & Dimension

Circuit No.	Dimensions		
	A	B	C
02	1.25	7.75	3.05
03	2.50	9.00	4.30
04	3.75	10.25	5.55
05	5.00	11.50	6.80
06	6.25	12.75	8.05
07	7.50	14.00	9.30
08	8.75	15.25	10.55
09	10.00	16.50	11.80
10	11.25	17.75	13.05
11	12.50	19.00	14.30
12	13.75	20.25	15.55
13	15.00	21.50	16.80
14	16.25	22.75	18.05
15	17.50	24.00	19.30
16	18.75	25.25	20.55
17	20.00	26.50	21.80
18	21.25	27.75	23.05

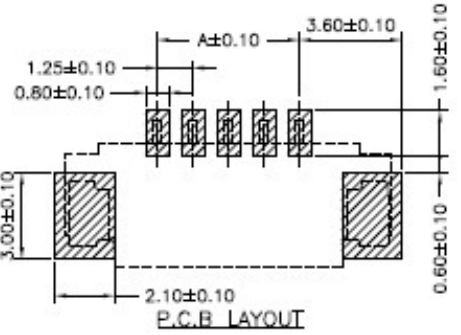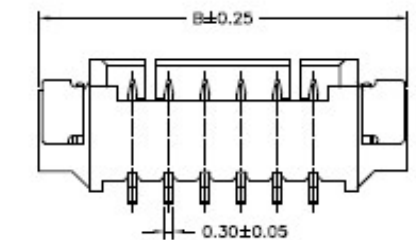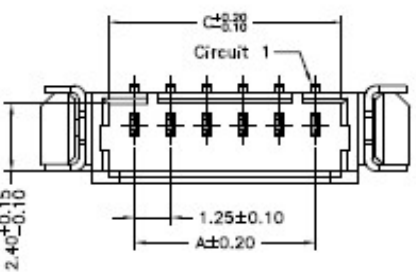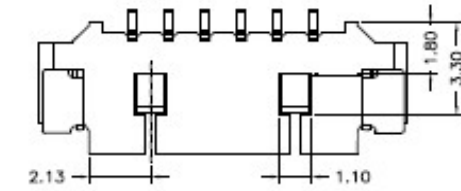

	<b>DESCRIPTION :</b> 1.25mm Pitch, Receptacle, Single Row, SMD, Right Angle	<b>GENERAL TOLERANCE</b>	
	<b>PART NO. :</b> 1250JRSXX-4NL00	X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05	SCALE : Free  