
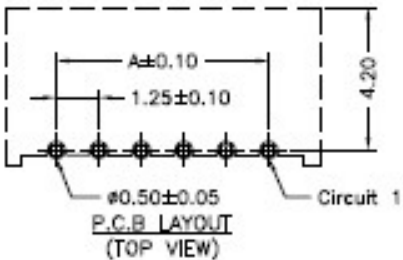
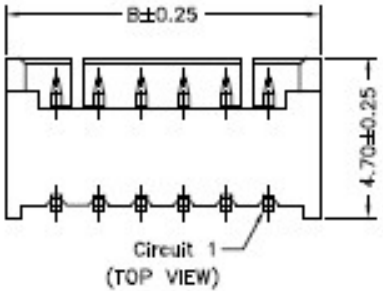
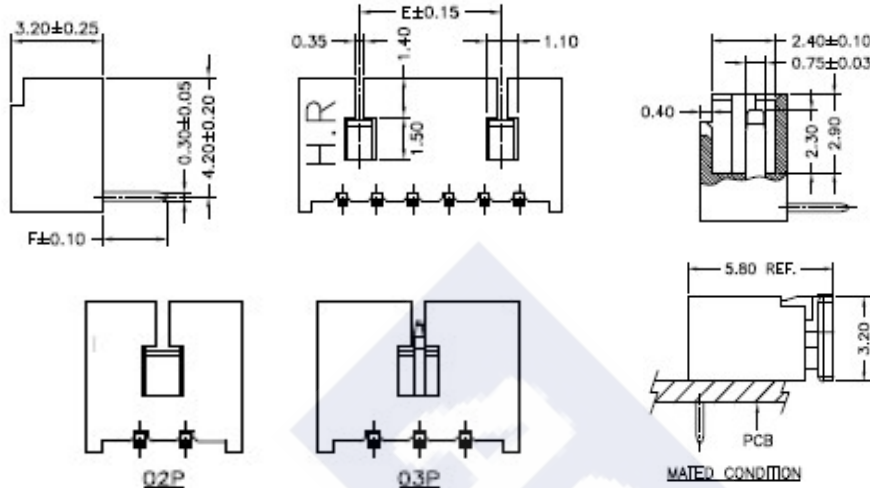


RoHS

Reach

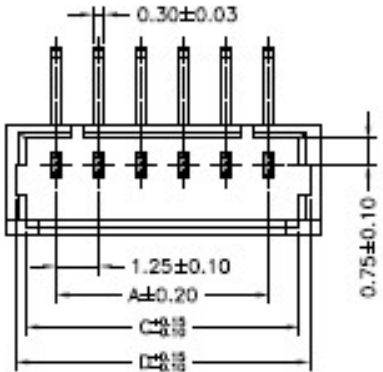

Ordering Information & Dimension

Circuit NO.	Dimensions					Circuit NO.	Dimensions				
	A	B	C	D	E		A	B	C	D	E
02	----	4.25	3.05	3.65	----	11	12.50	15.50	14.30	14.90	11.25
03	2.50	5.50	4.30	4.90	----	12	13.75	16.75	15.55	16.15	12.50
04	3.75	6.75	5.55	6.15	2.50	13	15.00	18.00	16.80	17.40	13.75
05	5.00	8.00	6.80	7.40	3.75	14	16.25	19.25	18.05	18.65	15.00
06	6.25	9.25	8.05	8.65	5.00	15	17.50	20.50	19.30	19.90	16.25
07	7.50	10.50	9.30	9.90	6.25	16	18.25	21.75	20.55	21.15	17.50
08	8.75	11.75	10.55	11.15	7.50	17	20.00	23.00	21.80	22.40	18.25
09	10.00	13.00	11.80	12.40	8.75	18	21.25	24.25	23.05	23.65	20.00
10	11.25	14.25	13.05	13.65	10.00						

Explanation of PN.

1250J R XX - 4 NL X X

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Connector Type : Right Angle
- ③ Circuits No.
- ④ Insulator Material : Nylon6T, UL 94-V0
- ⑤ Color : Natural(Beige)
- ⑥ Contact Plating : 0 : Matte Tin-plated, 1 : Bright Tin-plated, 2 : Gold Flash
- ⑦ Pin Length: 0 : 2.30mm, 1 : 1.70mm

Specification :

- Current Rating : 1A AC,DC
- Voltage Rating : 125V AC,DC
- Temperature Range : -25°C ~ +85°C
- Contact Resistance : 20mΩ Max.
- Insulation Resistance : 100mΩ Min.
- Withstanding Voltage : 500V AC/minute
- Pin Material : Phosphor Bronze
- Insulator Material : Nylon6T, UL 94-V0
- Color : Natural(Beige)

	DESCRIPTION : 1.25mm Pitch, Receptacle, Single Row, DIP, Right Angle	GENERAL TOLERANCE	
	PART NO. : 1250JRXX-4NLXX	X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05	SCALE : Free