

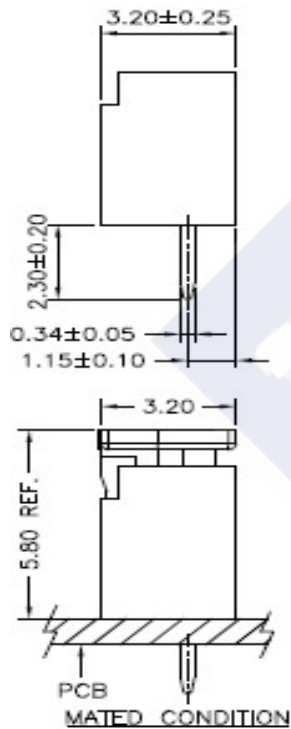


RoHS

Reach

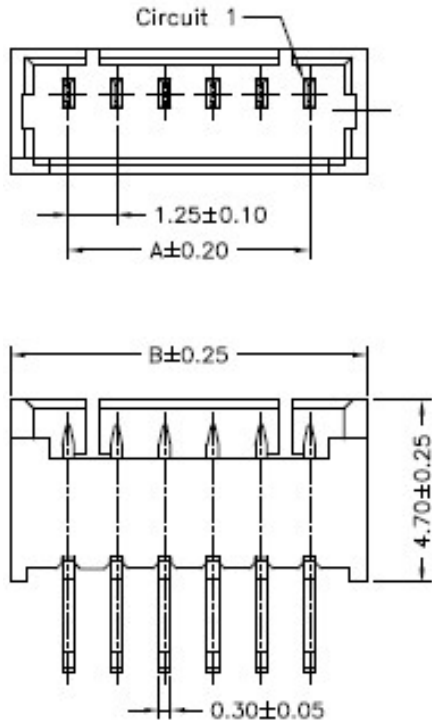

Ordering Information & Dimension

Circuit NO.	Dimensions	
	A	B
02	1.25	4.25
03	2.50	5.50
04	3.75	6.75
05	5.00	8.00
06	6.25	9.25
07	7.50	10.50
08	8.75	11.75
09	10.00	13.00
10	11.25	14.25
11	12.50	15.50
12	13.75	16.75
13	15.00	18.00
14	16.25	19.25
15	17.50	20.50
16	18.75	21.75
17	20.00	23.00
18	21.25	24.25

Explanation of PN.

1250J V XX - 4 NL 0

① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Connector Type : Straight Angle
- ③ Circuits No.
- ④ Insulator Material : Nylon6T, UL 94-V0
- ⑤ Color : Natural(Beige)
- ⑥ Contact Plating : Tin-plated,

Specification :

Current Rating : 1A AC,DC

Voltage Rating : 125V AC,DC

Temperature Range : -25°C ~ +85°C

Contact Resistance : 20mΩ Max.


Insulation Resistance : 100mΩ Min.

Withstanding Voltage : 500V AC/minute

Pin Material : Phosphor Bronze

Insulator Material : Nylon6T, UL 94-V0

Color : Natural(Beige)

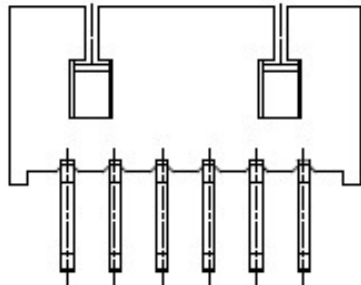

**ASIAS** ASIAS TECHNOLOGY CO.,LTD.

DESCRIPTION :  
1.25mm Pitch,  
Receptacle, Single Row, DIP,  
Straight Angle

PART NO. :  
1250JVXX-4NL0

**GENERAL TOLERANCE**

X.X ± 0.25  
X.XX ± 0.15  
X.XXX ± 0.05

SCALE : Free

