

RoHS

Reach

Explanation of PN.

**1252J H D XX - 3 XX**

① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Connector Type : Housing
- ③ Row Type : Dual Row
- ④ Circuits No.
- ⑤ Insulator Material : 3 : Nylon66, UL 94-V0
- ⑥ Color : GR : Gray  
BK : Black

## Ordering Information &amp; Dimension

Circuit NO.	Dimensions			
	A	B	C	D
10	5.00	10.40	8.00	9.00
12	6.25	11.65	9.25	10.25
14	7.50	12.90	10.50	11.50
20	11.25	16.65	14.25	15.25
30	17.50	22.90	20.50	21.50
34	20.00	25.40	23.00	24.00
36	21.25	26.65	24.25	25.25
40	23.75	29.15	26.75	27.75
42	25.00	30.40	28.00	29.00
50	30.00	35.40	33.00	34.00

Specification :

Current Rating : 1A AC,DC

Voltage Rating : 150V AC,DC




Temperature Range : -25°C ~ +85°C

Contact Resistance : 30mΩ Max.

Insulation Resistance : 500mΩ Min.

Withstanding Voltage : 500V AC/minute

Insulator Material : Nylon66, UL 94-V0

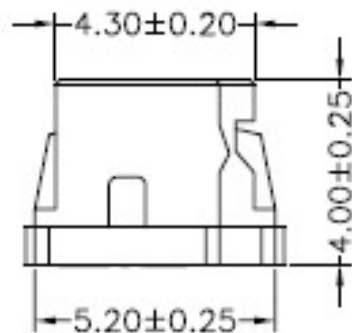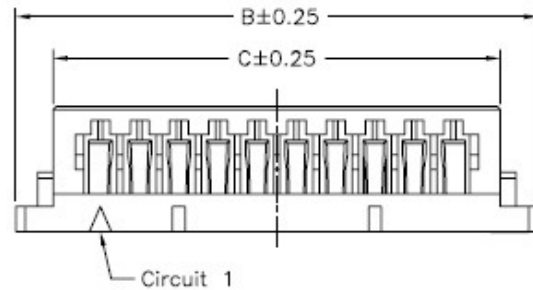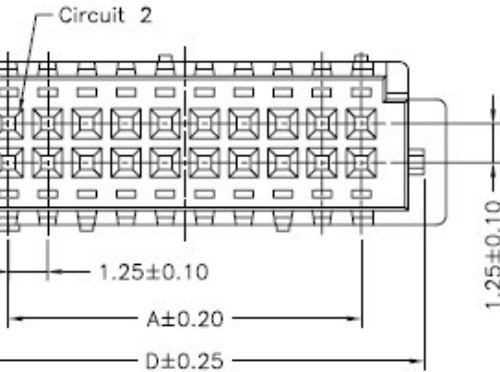

**ASIAS TECHNOLOGY CO.,LTD.**

**DESCRIPTION :**  
1.25mm Pitch, Housing,  
Dual row,  
Without Mounting Ear

**PART NO. :**  
1252JHDXX-3XX

**GENERAL TOLERANCE**

X.X ± 0.25  
X.XX ± 0.15  
X.XXX ± 0.05

SCALE : Free

