
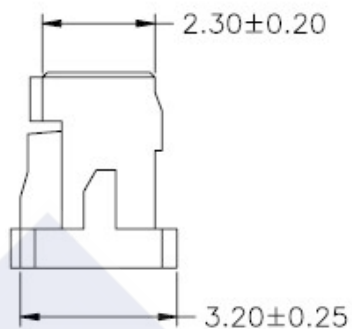
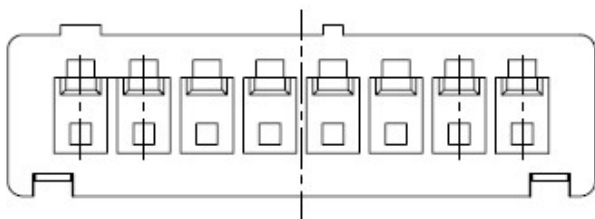
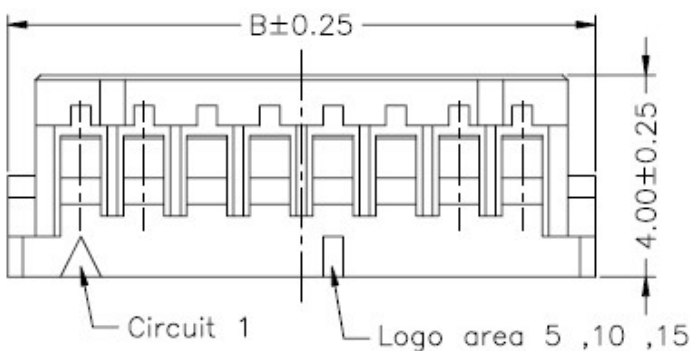


RoHS

Reach

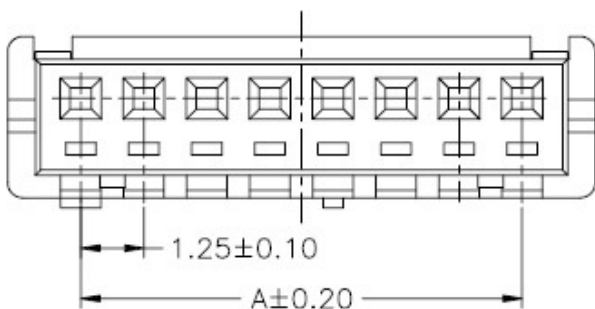

Ordering Information & Dimension

Circuit No.	Dimensions	
	A	B
02	1.25	4.15
03	2.50	5.40
04	3.75	6.65
05	5.00	7.90
06	6.25	9.15
07	7.50	10.40
08	8.75	11.65
09	10.00	12.90
10	11.25	14.15
11	12.50	15.40
12	13.75	16.65
13	15.00	17.90
14	16.25	19.15
15	17.50	20.40

Explanation of PN.

1252J H XX - 3 XX

① ② ③ ④ ⑤

- ① Series No.
- ② Connector Type : Housing
- ③ Circuits No.
- ④ Insulator Material : 3 : Nylon66, UL 94-V0
- ⑤ Color : GR : Gray
NL : Natural(Beige)
BK : Black

Specification :

Current Rating : 1A AC,DC

Voltage Rating : 150V AC,DC

Temperature Range : -25°C ~ +85°C

Contact Resistance : 30mΩ Max.

Insulation Resistance : 500mΩ Min.

Withstanding Voltage : 500V AC/minute

Insulator Material : Nylon66, UL 94-V0


ASIAS TECHNOLOGY CO.,LTD.
DESCRIPTION :
1.25mm Pitch, Housing,
Single row
PART NO. :
1252JHXX-3XX
GENERAL TOLERANCE
X.X ± 0.25
X.XX ± 0.15
X.XXX ± 0.05

SCALE : Free

