

RoHS

Reach

Explanation of PN.



1252J R XX - 3 GR 0

① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Connector Type : Right Angle
- ③ Circuits No.
- ④ Insulator Material : 3 : Nylon66, UL 94-V0
- ⑤ Color : GR : Gray
- ⑥ Contact Plating : 0 : Tin-plated

Ordering Information & Dimension


Circuit NO.	Dimensions	
	A	B
02	1.25	3.75
03	2.25	5.00
04	3.75	6.25
05	5.00	7.50
06	6.25	8.75
07	7.50	10.00
08	8.75	11.25
09	10.00	12.50
10	11.25	13.75
11	12.50	15.00
12	13.75	16.25
13	15.00	17.50
14	16.25	18.75
15	17.50	20.00

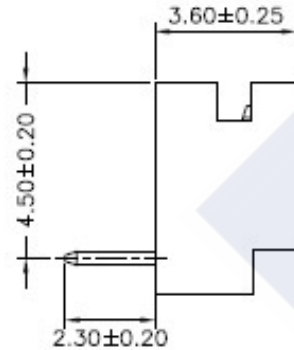

P.C.B LAYOUT

Specification :

- Current Rating : 1A AC,DC
- Voltage Rating : 150V AC,DC
- Temperature Range : -25°C ~ +85°C
- Contact Resistance : 30mΩ Max.
- Insulation Resistance : 500mΩ Min.
- Withstanding Voltage : 500V AC/minute
- Pin Material : Brass
- Insulator Material : Nylon66, UL 94-V0

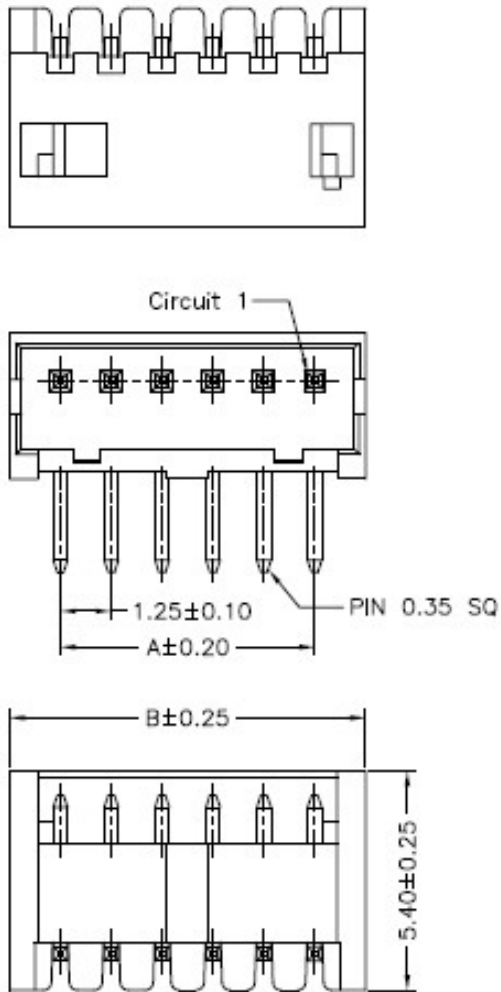

	DESCRIPTION : 1.25mm Pitch, Receptacle, Single Row, DIP, Right Angle	GENERAL TOLERANCE	
	PART NO. : 1252JRXX-3GR0	X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05	SCALE : Free