
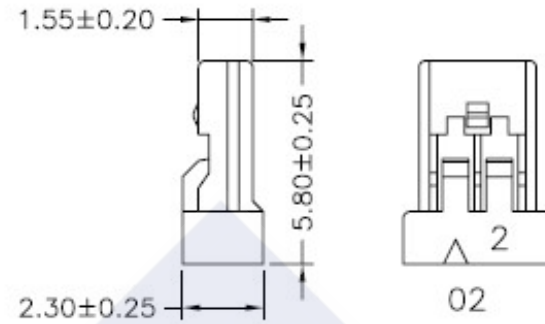


RoHS

Reach

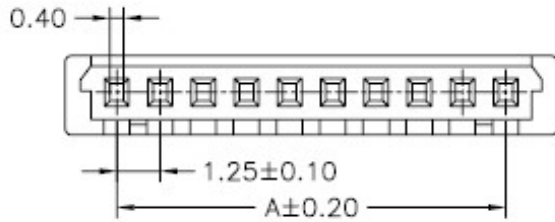

## Ordering Information &amp; Dimension

Circuit No.	Dimensions		
	A	B	C
02	1.25	4.25	2.75
03	2.50	5.50	4.00
04	3.75	6.75	5.25
05	5.00	8.00	6.50
06	6.25	9.25	7.75
07	7.50	10.50	9.00
08	8.75	11.75	10.25
09	10.00	13.00	11.50
10	11.25	14.25	12.75
11	12.50	15.50	14.00
12	13.75	16.75	15.25
13	15.00	18.00	16.50
14	16.25	19.25	17.75
15	17.50	20.50	19.00
20	23.75	26.75	25.25
21	25.00	28.00	26.50
25	30.00	33.00	31.50
30	36.25	39.25	37.75

Explanation of PN.

**1253J H XX - 3 GR**

① ② ③ ④ ⑤

- ① Series No.
- ② Connector Type : Housing
- ③ Circuits No.
- ④ Insulator Material : 3 : Nylon66, UL 94-V0
- ⑤ Color : GR : Gray

Specification :

Current Rating : 1A AC,DC

Voltage Rating : 150V AC,DC


Temperature Range : -25°C ~ +85°C

Contact Resistance : 30mΩ Max.

Insulation Resistance : 500mΩ Min.

Withstanding Voltage : 500V AC/minute

Insulator Material : Nylon66, UL 94-V0

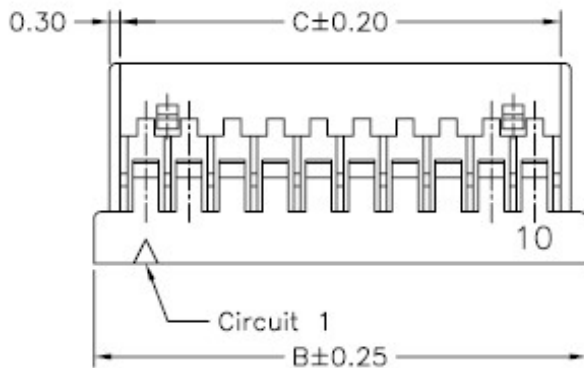

DESCRIPTION :  
**1.25mm Pitch, Housing,  
 Single row**

PART NO. :  
**1253JHXX-3GR**

**GENERAL TOLERANCE**

X.X ± 0.25  
 X.XX ± 0.15  
 X.XXX ± 0.05

SCALE : Free

