

RoHS

Reach

Explanation of PN.

**1253J R S XX - 4 NL X X**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧



- ① Series No.
- ② Connector Type : Right Angle
- ③ Mounting Type : SMD Type
- ④ Circuits No.
- ⑤ Insulator Material : 4 : Nylon6T, UL 94-V0
- ⑥ Color : NL : Natural(Beige)
- ⑦ Contact Plating : 0 : Matte Tin-plated ; 2 : Gold-flash
- ⑧ Soldering Tab : 0 : Matte Tin-plated ; 2 : Gold-flash


Specification :

- Current Rating : 1A AC,DC
- Voltage Rating : 150V AC,DC
- Temperature Range : -25°C ~ +85°C
- Contact Resistance : 30mΩ Max.
- Insulation Resistance : 500mΩ Min.
- Withstanding Voltage : 500V AC/minute
- Pin Material : Brass
- Soldering Tab : Brass
- Insulator Material : Housing : Nylon6T, UL 94-V0






Ordering Information & Dimension

Circuit No.	Dimensions		Circuit No.	Dimensions	
	A	B		A	B
02	1.25	7.45	11	12.50	18.70
03	2.50	8.70	12	13.75	19.95
04	3.75	9.95	13	15.00	21.20
05	5.00	11.20	14	16.25	22.45
06	6.25	12.45	15	17.50	23.70
07	7.50	13.70	20	23.75	29.95
08	8.75	14.95	21	24.00	31.20
09	10.00	16.20	25	30.00	36.20
10	11.25	17.45	30	36.25	42.45

	<b>DESCRIPTION :</b> 1.25mm Pitch, Receptacle, Single Row, SMD, Right Angle	<b>GENERAL TOLERANCE</b>	
	<b>PART NO. :</b> 1253JRSXX-4NLXX	X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05	SCALE : Free  

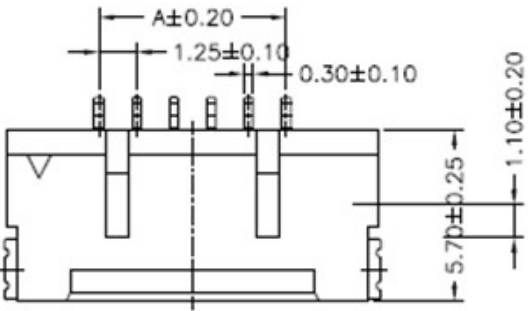

04. ~30.

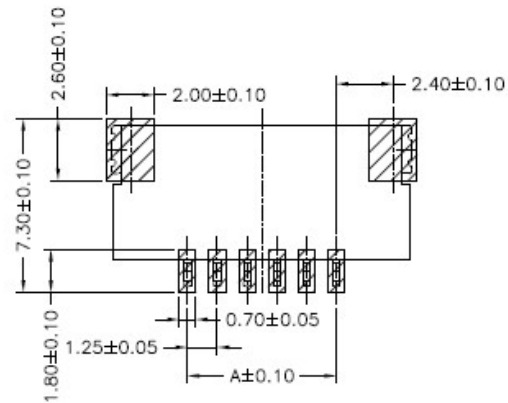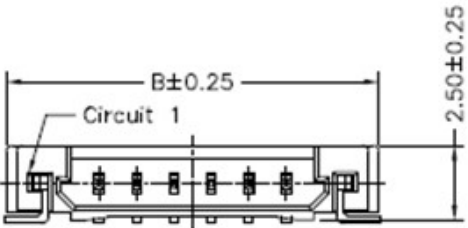

P.C.B. LAYOUT