

RoHS

Reach

Explanation of PN.





1253J V A S XX - 4 BK X X

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type : Straight Angle
- ③ Option Type : A Type
- ④ Mounting Type : SMD Type
- ⑤ Circuits No.
- ⑥ Insulator Material : 4 : Nylon6T, UL 94-V0
- ⑦ Color : BK : Black
- ⑧ Contact Plating : 0 : Matte Tin-plated ; 2 : Gold-flash
- ⑨ Soldering Tab : 0 : Matte Tin-plated ; 2 : Gold-flash





Specification :

- Current Rating : 1A AC,DC
- Voltage Rating : 150V AC,DC
- Temperature Range : -25°C ~ +85°C
- Contact Resistance : 20mΩ Max.
- Insulation Resistance : 500mΩ Min.
- Withstanding Voltage : 500V AC/minute
- Pin Material : Brass
- Soldering Tab : Brass
- Insulator Material : Housing : Nylon6T, UL 94-V0
Cap : Nylon6T, UL 94-V0

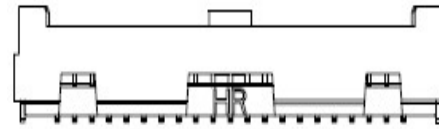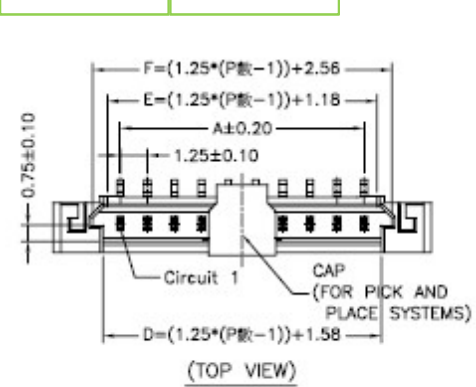

Ordering Information & Dimension

Circuit No.	Dimensions		
	A	B	C
02	1.25	7.45	3.50
03	2.50	8.70	3.50
04	3.75	9.95	3.50
05	5.00	11.20	3.50
06	6.25	12.45	3.50
07	7.50	13.70	3.50
08	8.75	14.95	3.50
09	10.00	16.20	3.50
10'	11.25	17.45	3.50
11	12.50	18.70	5.00
12	13.75	19.95	5.00
13	15.00	21.20	5.00
14	16.25	22.45	5.00
15	17.50	23.70	5.00
20	23.75	29.95	5.00
25	30.00	36.20	6.00
30	36.25	42.45	6.00

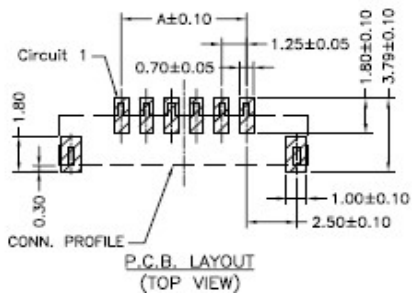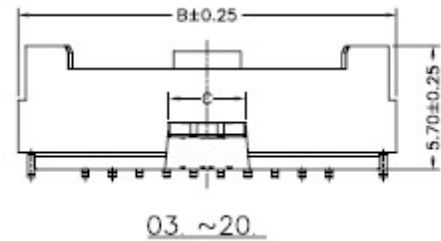

	DESCRIPTION : 1.25mm Pitch, Receptacle, Single Row, SMD, Straight Angle, A Type	GENERAL TOLERANCE	
	PART NO. : 1253JVASXX-4BKXX	X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05	SCALE : Free