

RoHS

Reach

Explanation of PN.

**1272J V A D XX - 4 BK 2**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧





- ① Series No.
- ② Connector Type : Straight Angle
- ③ Option Type : A Type
- ④ Row Type : Dual Row
- ⑤ Circuits No.
- ⑥ Insulator Material : 4 : Nylon6T, UL 94-V0
- ⑦ Color : BK : Black
- ⑧ Contact Plating : 2 : Gold-flash


Specification :

- Current Rating : 1A AC,DC
- Voltage Rating : 250V AC,DC
- Temperature Range : -25°C ~ +85°C
- Contact Resistance : 20mΩ Max.
- Insulation Resistance : 5000mΩ Min.
- Withstanding Voltage : 500V AC/minute
- Pin Material : Brass
- Insulator Material : Nylon6T, UL 94-V0

Ordering Information & Dimension

Circuits No.	Dimensions		Circuits No.	Dimensions		Circuits No.	Dimensions	
	A	B		A	B		A	B
06	2.54	3.81	38	22.86	24.13	70	43.18	44.45
08	3.81	5.08	40	24.13	25.40	72	44.45	45.72
10	5.08	6.35	42	25.40	26.67	74	45.72	46.99
12	6.35	7.62	44	26.67	27.94	76	46.99	48.26
14	7.62	8.89	46	27.94	29.21	78	48.26	49.53
16	8.89	10.16	48	29.21	30.48	80	49.53	50.80
18	10.16	11.43	50	30.48	31.75	82	50.80	52.07
20	11.43	12.70	52	31.75	33.02	84	52.07	53.34
22	12.70	13.97	54	33.02	34.29	86	53.34	54.61
24	13.97	15.24	56	34.29	35.56	88	54.61	55.88
26	15.24	16.51	58	35.56	36.83	90	55.88	57.15
28	16.51	17.78	60	36.83	38.10	92	57.15	58.42
30	17.78	19.05	62	38.10	39.37	94	58.42	59.69
32	19.05	20.32	64	39.37	40.64	96	59.69	60.96
34	20.32	21.59	66	40.64	41.91	08	60.96	62.23
36	21.59	22.86	68	41.91	43.18	100	62.23	63.50

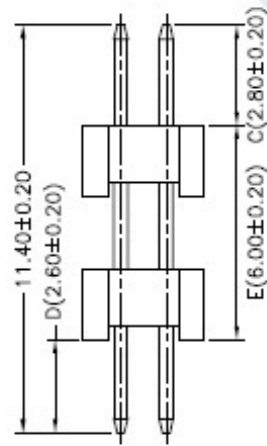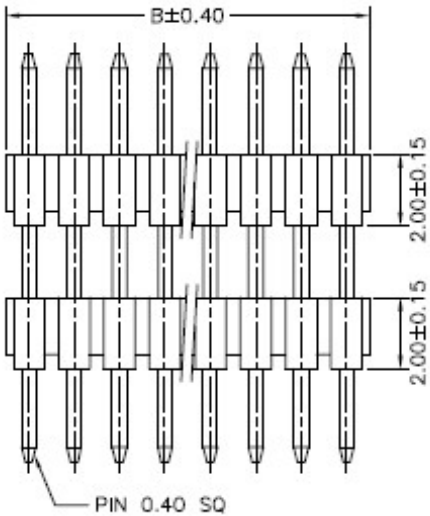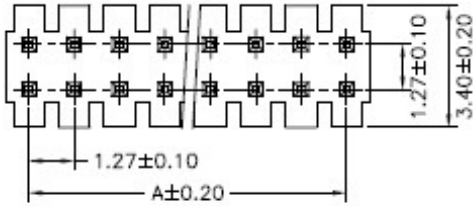

	<b>DESCRIPTION :</b> 1.27mm Pitch, Pin Header, Dual Row, SMD, Straight Angle, A Type	<b>GENERAL TOLERANCE</b>	
	<b>PART NO. :</b> 1272JVADXX-4BK2	X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05	SCALE : Free  