

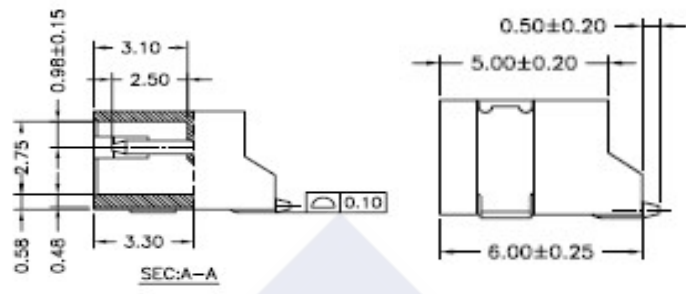
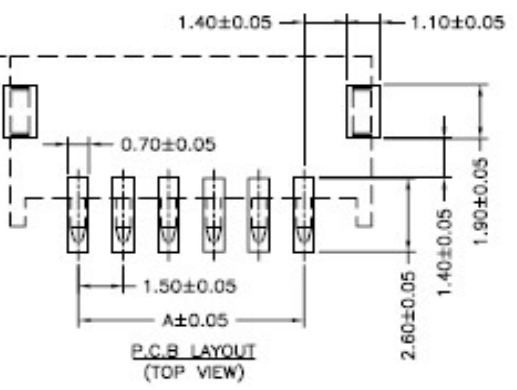
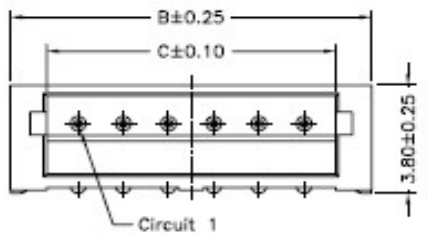


RoHS

Reach

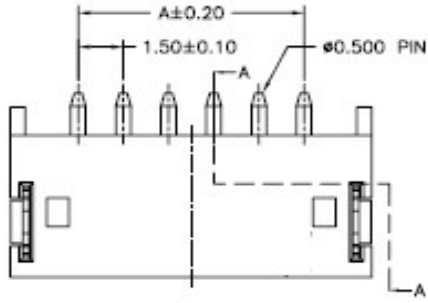

Ordering Information & Dimension

| Circuit No. | Dimensions | | |
|-------------|------------|-------|-------|
| | A | B | C |
| 02P | 1.50 | 6.00 | 3.60 |
| 03P | 3.00 | 7.50 | 5.10 |
| 04P | 4.50 | 9.00 | 6.60 |
| 05P | 6.00 | 10.50 | 8.10 |
| 06P | 7.50 | 12.00 | 9.60 |
| 07P | 9.00 | 13.50 | 11.10 |
| 08P | 10.50 | 15.00 | 12.60 |
| 09P | 12.00 | 16.50 | 14.10 |
| 10P | 13.50 | 18.00 | 15.60 |
| 11P | 15.00 | 19.50 | 17.10 |
| 12P | 16.50 | 21.00 | 18.60 |
| 13P | 18.00 | 22.50 | 20.10 |

Explanation of PN.

1500J R S XX - X NL X X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② Connector Type : Right Angle
- ③ Mounting Type : SMD
- ④ Circuits No.
- ⑤ Insulator Material : 4 : Nylon6T, UL 94-V0
5 : LCP, UL 94-V0
- ⑥ Color : NL : Natural
- ⑦ Contact Plating : 0.Matte Tin-plated ; 3.Gold-flash
- ⑧ Soldering Tab : 0.Matte Tin-plated ; 3.Gold-flash

Specification :

- Current Rating : 1A AC,DC
- Voltage Rating : 100V AC,DC
- Temperature Range : -25°C ~ +85°C
- Contact Resistance : 20mΩ Max.
- Insulation Resistance : 500mΩ Min.
- Withstanding Voltage : 500V AC/minute
- Pin Material : Brass
- Soldering Tab : Brass
- Insulator Material : Housing : Nylon6T, UL 94-V0 or LCP, UL 94-V0

| | | | |
|--|--|---|------------------|
| | DESCRIPTION : 1.50mm Pitch, Receptacle, Single Row, SMD, Right Angle | GENERAL TOLERANCE | |
| | PART NO. : 1500JRSXX-XNLXX | X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05 | SCALE : Free |