
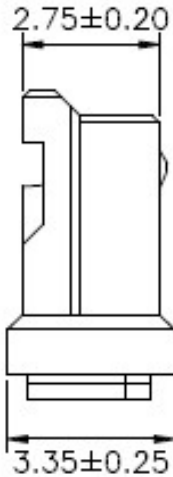
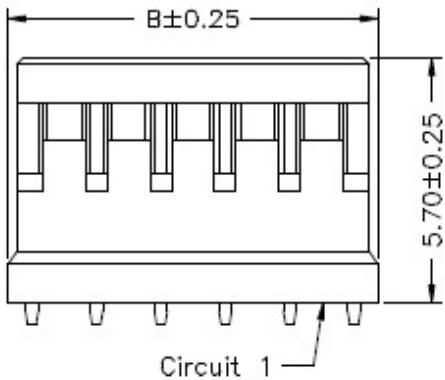
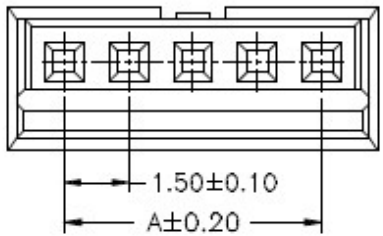


RoHS

Reach

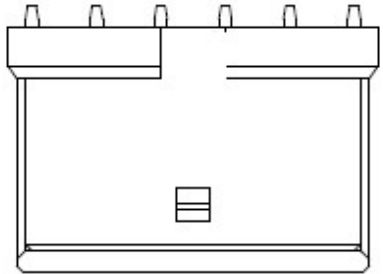

Ordering Information & Dimension

Circuit NO.	Dimensions	
	A	B
02	1.50	4.10
03	3.00	5.60
04	4.50	7.10
05	6.00	8.60
06	7.50	10.10
07	9.00	11.60
08	10.50	13.10
09	12.00	14.60
10	13.50	16.10
11	15.00	17.60
12	16.50	19.10
13	18.00	20.60
14	19.50	22.10
15	21.00	23.60

Explanation of PN.

1501J H XX - 3 WH

① ② ③ ④ ⑤

- ① Series No.
- ② Connector Type : Housing
- ③ Circuits No.
- ④ Insulator Material : Nylon66, UL 94-V0
- ⑤ Color : WH : White

Specification :

Current Rating : 3A AC,DC

Voltage Rating : 350V AC,DC

Temperature Range : -25°C ~ +85°C

Contact Resistance : 20mΩ Max.

Insulation Resistance : 1000mΩ Min.

Withstanding Voltage : 500V AC/minute

Insulator Material : Nylon66, UL 94-V0

DESCRIPTION :
1.50mm Pitch,
Housing, Single Row,

PART NO. :
1501JHXX-3WH

GENERAL TOLERANCE

SCALE : Free

X.X ± 0.25
 X.XX ± 0.15
 X.XXX ± 0.05

