
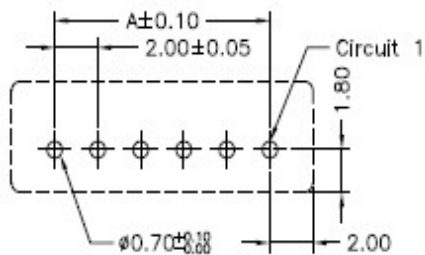
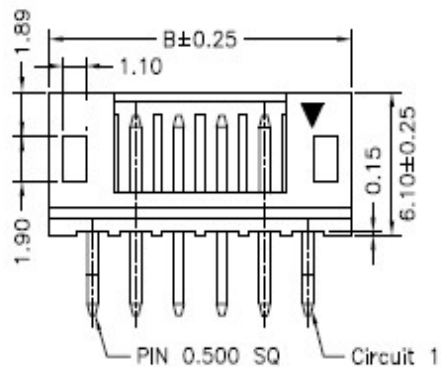





RoHS

Reach

(TOP VIEW)

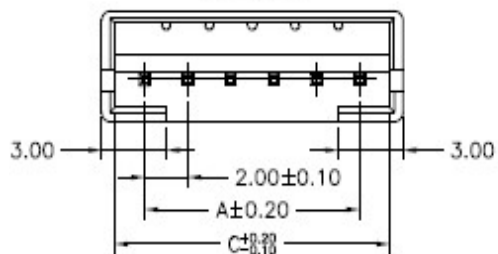

P.C.B LAYOUT(TOP VIEW)

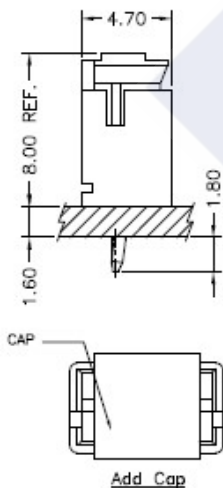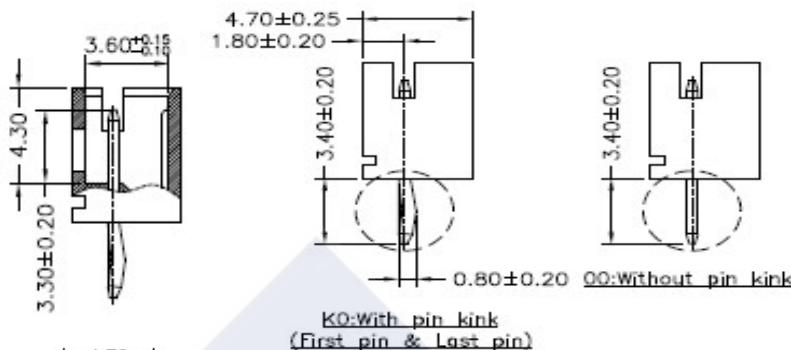

Ordering Information & Dimension

Circuit No.	Dimensions		
	A	B	C
02	2.00	6.00	4.80
03	4.00	8.00	6.80
04	6.00	10.00	8.80
05	8.00	12.00	10.80
06	10.00	14.00	12.80
07	12.00	16.00	14.80
08	14.00	18.00	16.80
09	16.00	20.00	18.80
10	18.00	22.00	20.80
11	20.00	24.00	22.80
12	22.00	26.00	24.80
13	24.00	28.00	26.80
14	26.00	30.00	28.80
15	28.00	32.00	30.80
16	30.00	34.00	32.80
17	32.00	36.00	34.80
18	34.00	38.00	36.80

Explanation of PN.

2001J V X XX - 3 XX X

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Connector Type : Straight Angle
- ③ Pin Type : 0 : Without the pin kink
1 : With the pin kink
- ④ Circuits No.
- ⑤ Insulator Material : Nylon66, UL 94-V0
- ⑥ Color : WH : White
BK : Black
- ⑦ Contact Plating : 0 : Tin-plated
2 : Gold-flash

Specification :

Current Rating : 2A AC,DC

Voltage Rating : 100V AC,DC

Temperature Range : -25°C ~ +85°C

Contact Resistance : 10mΩ Max.

Insulation Resistance : 1000mΩ Min.

Withstanding Voltage : 800V AC/minute

Pin Material : Brass

Insulator Material : Nylon66, UL 94-V0



DESCRIPTION :
2.00mm Pitch,
Receptacle, Single Row, DIP,
Straight Angle

PART NO. :
2001JVXXX-3XXX

GENERAL TOLERANCE

X.X ± 0.25
X.XX ± 0.15
X.XXX ± 0.05

SCALE : Free

