
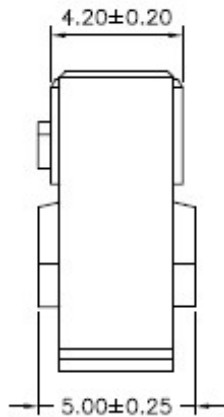
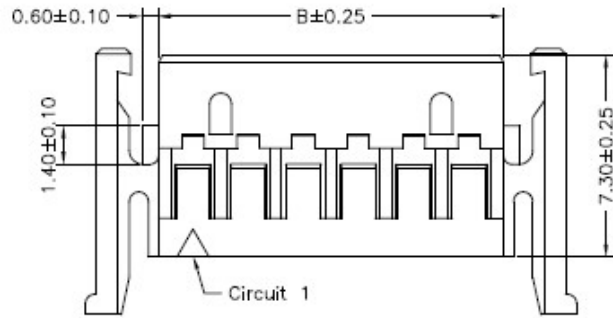


RoHS

Reach

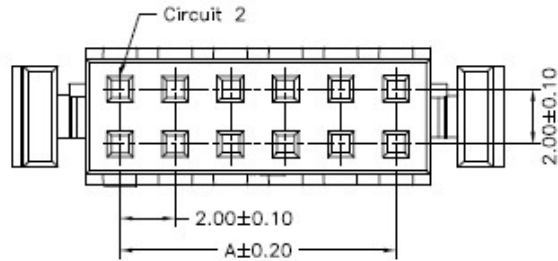

## Ordering Information &amp; Dimension

Circuit NO.	Dimensions		Circuit NO.	Dimensions	
	A	C		A	C
04	2.00	4.50	24	22.00	24.50
06	4.00	6.50	26	24.00	26.50
08	6.00	8.50	28	26.00	28.50
10	8.00	10.50	30	28.00	30.50
12	10.00	12.50	32	30.00	32.50
14	12.00	14.50	34	32.00	34.50
16	14.00	16.50	36	34.00	36.50
18	16.00	18.50	38	36.00	38.50
20	18.00	20.50	40	38.00	40.50
22	20.00	22.50	44	42.00	44.50

Explanation of PN.

2004J H 1 D XX - 3 WH

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Connector Type : Housing
- ③ Option Type : With Mounting Ear
- ④ Row Type : Dual row
- ⑤ Circuits No.
- ⑥ Insulator Material : 3 : Nylon66, UL 94-V0
- ⑦ Color : WH : White

Specification :

Current Rating : 3A AC,DC

Voltage Rating : 250V AC,DC

Temperature Range : -25°C ~ +85°C

Contact Resistance : 10mΩ Max.

Insulation Resistance : 1000mΩ Min.

Withstanding Voltage : 800V AC/minute

Insulator Material : Nylon66, UL 94-V0

**DESCRIPTION :**  
2.00mm Pitch, Housing,  
Dual row,  
With Mounting Ear

**PART NO. :**  
2004JH1DXX-3WH

**GENERAL TOLERANCE**

X.X ± 0.25  
X.XX ± 0.15  
X.XXX ± 0.05

SCALE : Free

