

RoHS

Reach

Ordering Information & Dimension

Explanation of PN.

2004J HB X D XX - 3 WH

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Connector Type : Housing with the lock
- ③ Option Type : 0 : Standard Type  
1 : With the salient point
- ④ Row Type : Dual row
- ⑤ Circuits No.
- ⑥ Insulator Material : 3 : Nylon66, UL 94-V0
- ⑦ Color : WH : White

Specification :

Current Rating : 3A AC,DC

Voltage Rating : 250V AC,DC

Temperature Range : -25°C ~ +85°C





Contact Resistance : 10mΩ Max.

Insulation Resistance : 1000mΩ Min.



Withstanding Voltage : 800V AC/minute

Insulator Material : Nylon66, UL 94-V0

Circuit No.	Dimensions			
	A	B	C	D
2X02	2.00	5.90	4.50	---
2X03	4.00	7.90	6.50	---
2X04	6.00	9.90	8.50	---
2X05	8.00	11.90	10.50	---
2X06	10.00	13.90	12.50	---
2X07	12.00	15.90	14.50	10.00
2X08	14.00	17.90	16.50	12.00
2X09	16.00	19.90	18.50	14.00
2X10	18.00	21.90	20.50	16.00
2X11	20.00	23.90	22.50	18.00
2X12	22.00	25.90	24.50	20.00
2X13	24.00	27.90	26.50	22.00
2X14	26.00	29.90	28.50	24.00
2X15	28.00	31.90	30.50	26.00
2X16	30.00	33.90	32.50	28.00
2X17	32.00	35.90	34.50	30.00
2X18	34.00	37.90	36.50	32.00
2X19	36.00	39.90	38.50	34.00
2X20	38.00	41.90	40.50	36.00
2X21	40.00	43.90	42.50	38.00
2X22	42.00	45.90	44.50	40.00

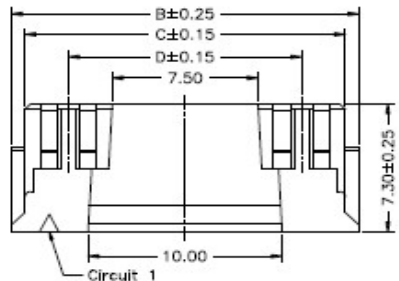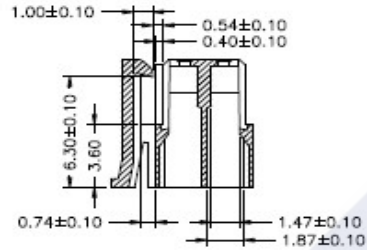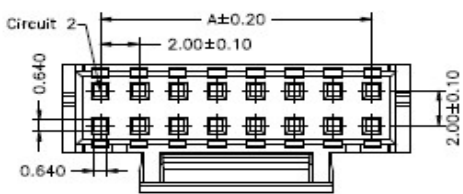

14P~44P

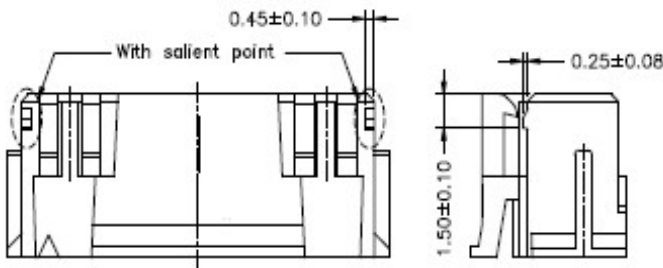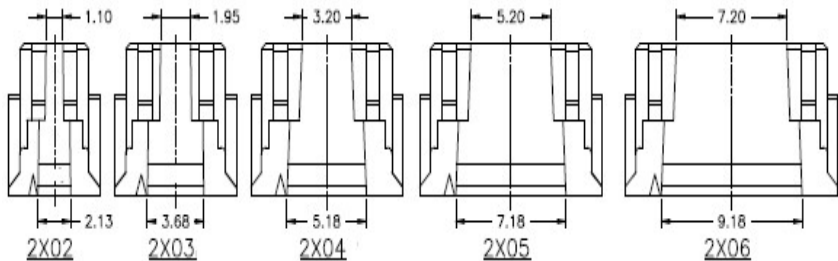

	<b>DESCRIPTION :</b> 2.00mm Pitch, Housing, Dual row, With Lock	<b>GENERAL TOLERANCE</b>	
	<b>PART NO. :</b> 2004JHBDXX-3WH	X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05	SCALE : Free 