





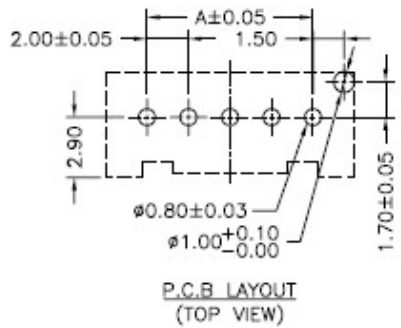
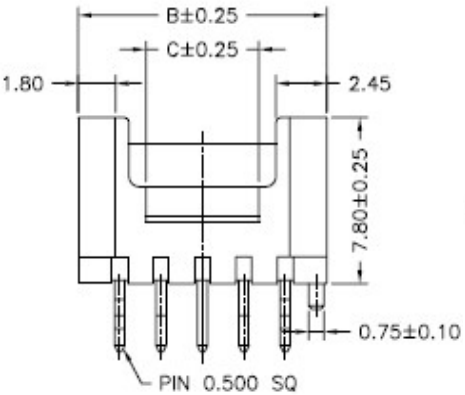


RoHS

Reach

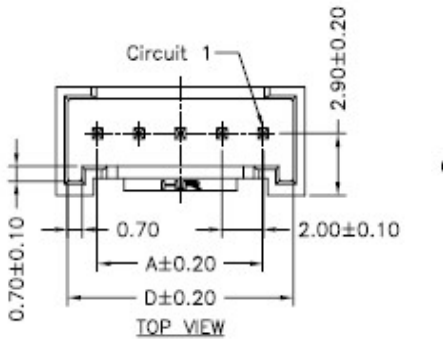

Ordering Information & Dimension

| Circuit No. | Dimensions |       |       |       |
|-------------|------------|-------|-------|-------|
|             | A          | B     | C     | D     |
| 02          | 2.00       | 6.00  | 1.50  | 4.90  |
| 03          | 4.00       | 8.00  | 1.46  | 6.90  |
| 04          | 6.00       | 10.00 | 3.46  | 8.90  |
| 05          | 8.00       | 12.00 | 5.46  | 10.90 |
| 07          | 12.00      | 16.00 | 9.46  | 14.90 |
| 08          | 14.00      | 18.00 | 11.46 | 16.90 |
| 09          | 16.00      | 20.00 | 13.46 | 18.90 |
| 10          | 18.00      | 22.00 | 15.46 | 20.90 |
| 11          | 20.00      | 24.00 | 17.46 | 22.90 |
| 12          | 22.00      | 26.00 | 19.46 | 24.90 |
| 13          | 24.00      | 28.00 | 21.46 | 26.90 |
| 14          | 26.00      | 30.00 | 23.46 | 28.90 |
| 15          | 28.00      | 32.00 | 25.46 | 30.90 |
| 16          | 30.00      | 34.00 | 27.46 | 32.90 |

Explanation of PN.

2006J V F XX - 1 XX 2

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Connector Type : Straight Angle
- ③ Option Type : With Foot
- ④ Circuits No.
- ④ Insulator Material : 1 : Nylon46, UL 94-V0
- ⑤ Color : NL : Natural(Beige)  
BK : Black
- ⑦ Contact Plating : 2 : Gold-flash

Specification :

Current Rating : 3A AC,DC

Voltage Rating : 250V AC,DC

Temperature Range : -25°C ~ +85°C

Contact Resistance : 30mΩ Max.

Insulation Resistance : 1000mΩ Min.

Withstanding Voltage : 1000V AC/minute

Pin Material : Brass

Insulator Material : Nylon46, UL 94-V0

|  |  |   |                      |
|--|--|---|----------------------|
|  | <b>DESCRIPTION :</b><br>2.00mm Pitch,<br>Receptacle, Single Row, DIP,<br>Straight Angle, With Foot | <b>GENERAL TOLERANCE</b>                  |                      |
|  | <b>PART NO. :</b><br>2006JVFX-1XX2   | X.X ± 0.25<br>X.XX ± 0.15<br>X.XXX ± 0.05 | SCALE : Free<br><br> |