

RoHS

Reach

Explanation of PN.

2015J H XX - 3 BK

① ② ③ ④ ⑤

- ① Series No.
- ② Connector Type : Housing
- ③ Circuits No.
- ④ Insulator Material : Nylon66, UL 94-V0
- ⑤ Color : BK : Black

Ordering Information & Dimension

Circuit NO.	Dimensions		Circuit NO.	Dimensions	
	A	B		A	B
02	2.00	4.20	17	32.00	34.20
03	4.00	6.20	18	34.00	36.20
04	6.00	8.20	19	36.00	38.20
05	8.00	10.20	20	38.00	40.20
06	10.00	12.20	21	40.00	42.20
07	12.00	14.20	22	42.00	44.20
08	14.00	16.20	23	44.00	46.20
09	16.00	18.20	24	46.00	48.20
10	18.00	20.20	25	48.00	50.20
11	20.00	22.20	26	50.00	52.20
12	22.00	24.20	27	52.00	54.20
13	24.00	26.20	28	54.00	56.20
14	26.00	28.20	29	56.00	58.20
15	28.00	30.20	30	58.00	60.20
16	30.00	32.20			

Specification :

Current Rating : 2A AC,DC

Voltage Rating : 250V AC,DC




Temperature Range : -25°C ~ +85°C

Contact Resistance : 20mΩ Max.

Insulation Resistance : 1000mΩ Min.

Withstanding Voltage : 1000V AC/minute

Insulator Material : Nylon66, UL 94-V0

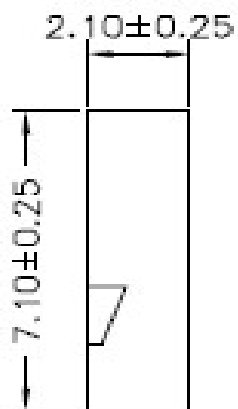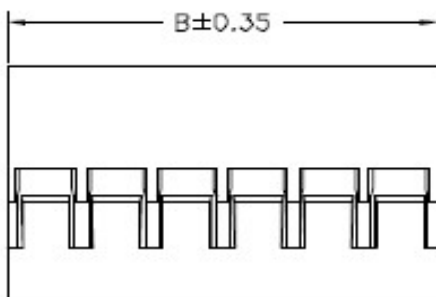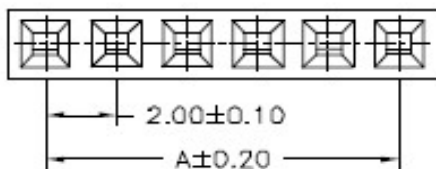

DESCRIPTION :
**2.00mm Pitch,
 Housing, Single Row**

PART NO. :
2015JHXX-3BK

GENERAL TOLERANCE

X.X ± 0.25
 X.XX ± 0.15
 X.XXX ± 0.05

SCALE : Free

