

RoHS

Reach

Explanation of PN.

2016J H X D XX - 3 BK



- ① Series No.
 ② Connector Type : Housing
 ③ Option Type : 1 : With protrusion A
 2 : With protrusion B
 3 : With protrusion C
 4 : With protrusion D
 ④ Row Type : Dual Row
 ⑤ Circuits No.
 ⑥ Insulator Material : Nylon66, UL 94-V0
 ⑦ Color : BK : Black

Ordering Information & Dimension



Circuit NO.	Dimensions		Circuit NO.	Dimensions	
	A	B		A	B
04	2.00	4.20	28	26.00	28.20
06	4.00	6.20	30	28.00	30.20
08	6.00	8.20	32	30.00	32.20
10	8.00	10.20	34	32.00	34.20
12	10.00	12.20	36	34.00	36.20
14	12.00	14.20	38	36.00	38.20
16	14.00	16.20	40	38.00	40.20
18	16.00	18.20	42	40.00	42.20
20	18.00	20.20	44	42.00	44.20
22	20.00	22.20	46	44.00	46.20
24	22.00	24.20	48	46.00	48.20
26	24.00	26.20	50	48.00	50.20

Specification :



- Current Rating : 2A AC,DC
 Voltage Rating : 250V AC,DC
 Temperature Range : -25°C ~ +85°C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance : 1000mΩ Min.
 Withstanding Voltage : 1000V AC/minute
 Insulator Material : Nylon66, UL 94-V0

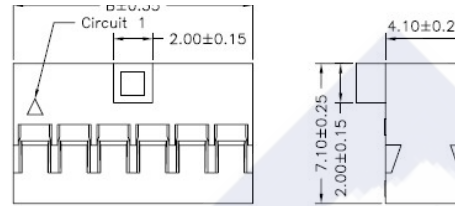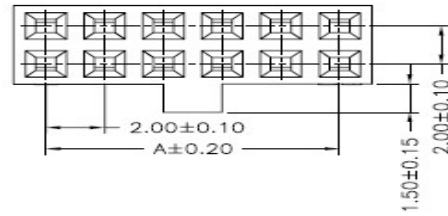



With protrusion C

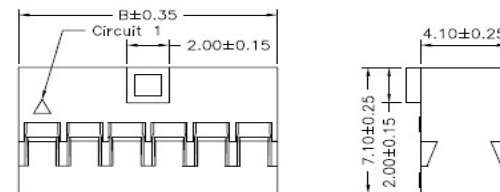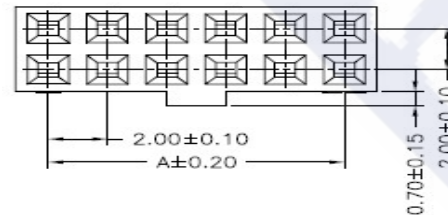

With protrusion D

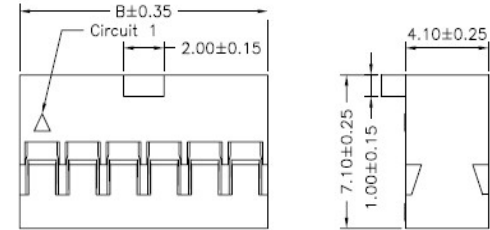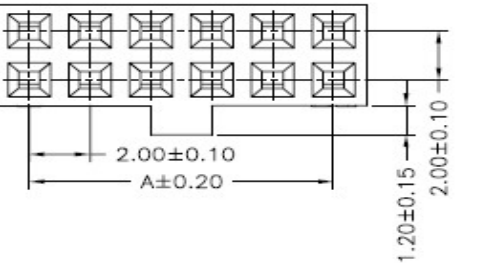

With protrusion A

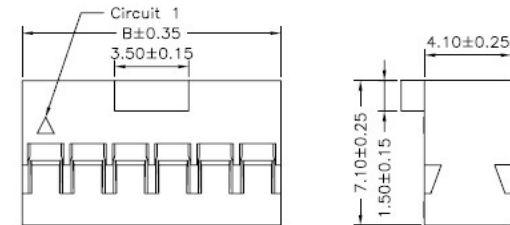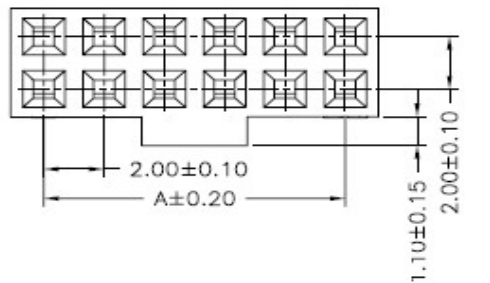

With protrusion B

ASIAS ASIAS TECHNOLOGY CO.,LTD.

DESCRIPTION :
 2.00mm Pitch,
 Housing, Dual Row,
 With the Protrusion

PART NO. :
 2016JHXDXX-3BK

GENERAL TOLERANCE

X.X ± 0.25
 X.XX ± 0.15
 X.XXX ± 0.05

SCALE : Free

