
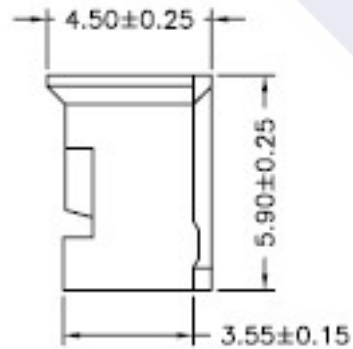
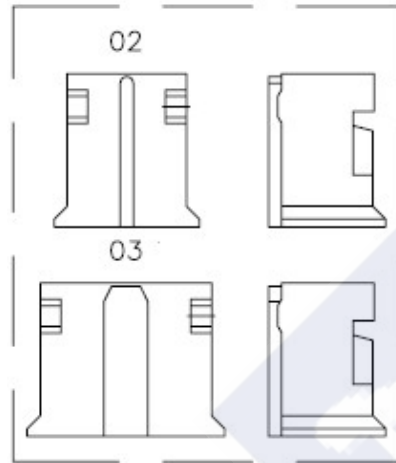
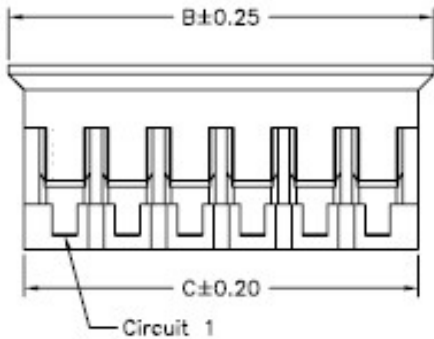


RoHS

Reach

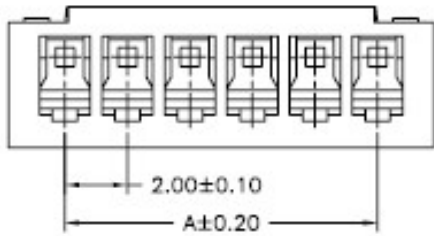

Ordering Information & Dimension

Circuit No.	Dimensions		
	A	B	C
02	2.00	5.60	4.60
03	4.00	7.60	6.60
04	6.00	9.60	8.60
05	8.00	11.60	10.60
06	10.00	13.60	12.60
07	12.00	15.60	14.60
08	14.00	17.60	16.60
09	16.00	19.60	18.60
10	18.00	21.60	20.60
11	20.00	23.60	22.60
12	22.00	25.60	24.60
13	24.00	27.60	26.60
14	26.00	29.60	28.60
15	28.00	31.60	30.60

Explanation of PN.

2100J H XX - 3 XX

① ② ③ ④ ⑤

- ① Series No.
- ② Connector Type : Housing
- ③ Circuits No.
- ④ Insulator Material : Nylon66, UL 94-V0
- ⑤ Color : RD : Red(153C~154C)
WH : White
BK : Black

Specification :

Current Rating : 3A AC,DC

Voltage Rating : 300V AC,DC

Temperature Range : -25°C ~ +85°C

Contact Resistance : 20mΩ Max.

Insulation Resistance : 100mΩ Min.

Withstanding Voltage : 1000V AC/minute

Insulator Material : Nylon66, UL 94-V0

ASIAS

ASIAS TECHNOLOGY CO.,LTD.

DESCRIPTION :
2.00mm Pitch,
Housing, Single Row
PART NO. :
2100JHXX-3XX
GENERAL TOLERANCE
X.X ± 0.25
X.XX ± 0.15
X.XXX ± 0.05

SCALE : Free

