

RoHS

Reach

Explanation of PN.



2100J V X XX - 3 RD 0

① ② ③ ④ ⑤ ⑥ ⑦


- ① Series No.
- ② Connector Type : Straight Angle
- ③ Option Type : 1 : Type 1 Pin Kink
2 : Type 2 Pin Kink
3 : Type 3 Pin Kink
- ④ Circuits No.
- ⑤ Insulator Material : 3 : Nylon66, UL 94-V0
- ⑥ Color : RD : Red(153C~154C)
- ⑦ Contact Plating : Tin-plated

Ordering Information & Dimension


Circuit NO.	Dimensions	
	A	B
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00

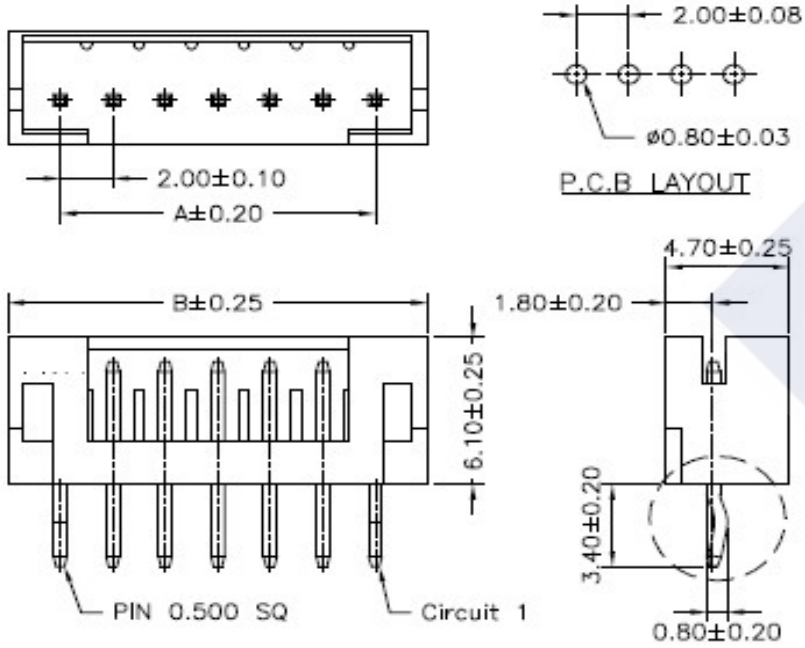

TYPE 1



TYPE 3



TYPE 2

Pin Kink Type

Specification :

- Current Rating : 3A AC,DC
- Voltage Rating : 300V AC,DC
- Temperature Range : -25°C ~ +85°C
- Contact Resistance : 20mΩ Max.
- Insulation Resistance : 100mΩ Min.
- Withstanding Voltage : 1000V AC/minute
- Pin Material : Brass
- Insulator Material : Nylon66, UL 94-V0

	DESCRIPTION : 2.00mm Pitch, Receptacle, Single Row, DIP, Straight Angle	GENERAL TOLERANCE	
	PART NO. : 2100JVXXX-3RD0	X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05	SCALE : Free