

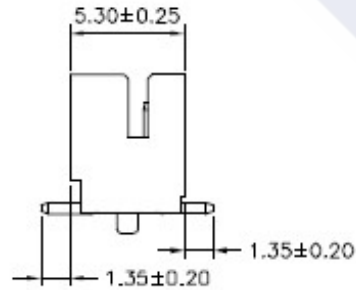
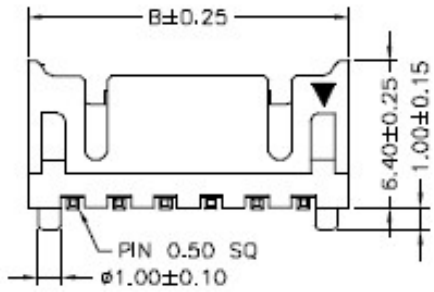
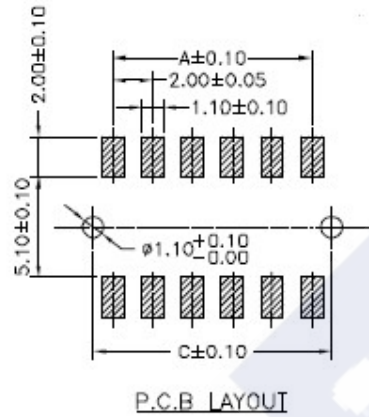


RoHS

Reach

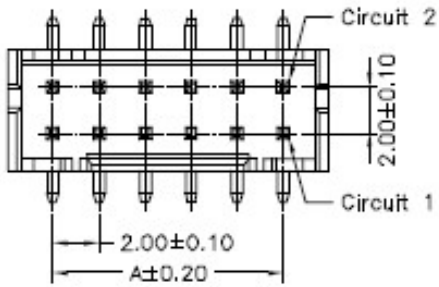

(FOR PICK AND PLACE SYSTEMS)



Ordering Information & Dimension

Circuit NO.	Dimensions		
	A	B	C
04	2.00	6.00	4.00
06	4.00	8.00	6.00
08	6.00	10.00	8.00
10	8.00	12.00	10.00
12	10.00	14.00	12.00
14	12.00	16.00	14.00
16	14.00	18.00	16.00
18	16.00	20.00	18.00
20	18.00	22.00	20.00
22	20.00	24.00	22.00
24	22.00	26.00	24.00
26	24.00	28.00	26.00
28	26.00	30.00	28.00
30	28.00	32.00	30.00
32	30.00	34.00	32.00
34	32.00	36.00	34.00
36	34.00	38.00	36.00
38	36.00	40.00	38.00
40	38.00	42.00	40.00

Explanation of PN.

2211J VB F S D XX - 1 NL 2

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type : Straight Angle B Type
- ③ Option Type : With Foot
- ④ Mounting Type : SMD Type
- ⑤ Row Type : Dual Row
- ⑥ Circuits No.
- ⑦ Insulator Material : 1 : Nylon46, UL 94-V0
- ⑧ Color : NL : Natural(Beige)
- ⑨ Contact Plating : Gold-flash

Specification :

Current Rating :	2A AC,DC
Voltage Rating :	250V AC,DC
Temperature Range :	-25°C ~ +85°C
Contact Resistance :	30mΩ Max.
Insulation Resistance :	1000mΩ Min.
Withstanding Voltage :	800V AC/minute
Pin Material :	Brass
Insulator Material :	Nylon46, UL 94-V0
Cap:	Nylon6T, UL 94-V0

DESCRIPTION :
2.00mm Pitch,
Receptacle, Dual Row, SMD,
Straight Angle, B Type, With Foot

PART NO. :
2211JVBFSDDXX-1NL2

GENERAL TOLERANCE

X.X ± 0.25
X.XX ± 0.15
X.XXX ± 0.05

SCALE : Free

