


RoHS

Reach

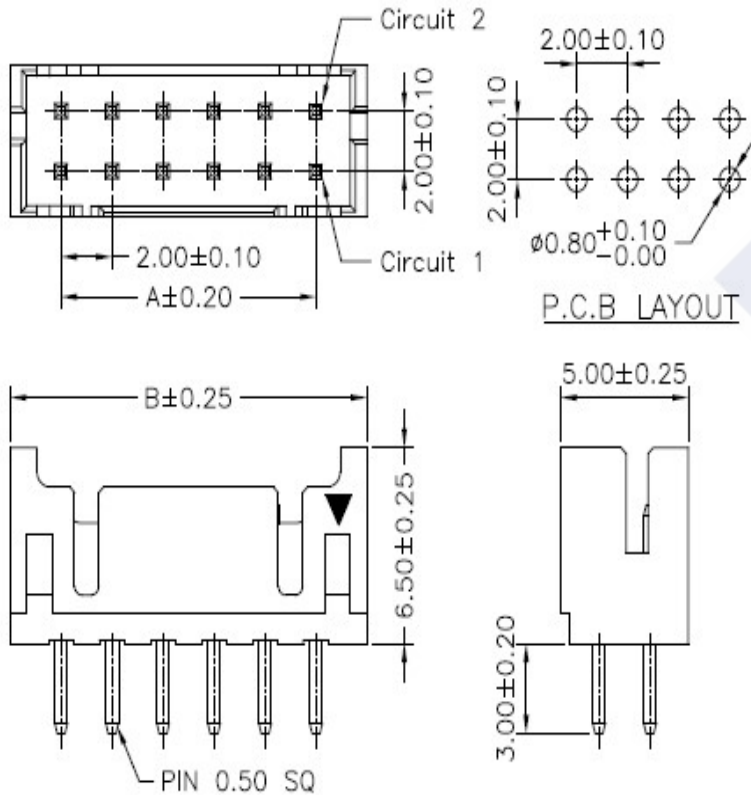

Ordering Information & Dimension

Circuit NO.	Dimensions		Circuit NO.	Dimensions	
	A	B		A	B
04	2.00	6.00	24	22.00	26.00
06	4.00	8.00	26	24.00	28.00
08	6.00	10.00	28	26.00	30.00
10	8.00	12.00	30	28.00	32.00
12	10.00	14.00	32	30.00	34.00
14	12.00	16.00	34	32.00	36.00
16	14.00	18.00	36	34.00	38.00
18	16.00	20.00	38	36.00	40.00
20	18.00	22.00	40	38.00	42.00
22	20.00	24.00			

Explanation of PN.

2211J V D XX - 3 BK 0

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Connector Type : Straight Angle
- ③ Row Type : Dual Row
- ④ Circuits No.
- ⑤ Insulator Material : 3 : Nylon66, UL 94-V0
- ⑥ Color : BK : Black
- ⑦ Contact Plating : Tin-plated

Specification :

Current Rating : 2A AC,DC

Voltage Rating : 250V AC,DC

Temperature Range : -25°C ~ +85°C


Contact Resistance : 30mΩ Max.

Insulation Resistance : 1000mΩ Min.

Withstanding Voltage : 800V AC/minute

Pin Material : Brass

Insulator Material : Nylon66, UL 94-V0

	DESCRIPTION : 2.00mm Pitch, Receptacle, Dual Row, DIP, Straight Angle	GENERAL TOLERANCE	
	PART NO. : 2211JVDXX-3BK0	X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05	SCALE : Free 