

RoHS

Reach

Explanation of PN.

2211J V F S D XX - 4 NL 0 0

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩


- ① Series No.
- ② Connector Type : Straight Angle
- ③ Option Type : With Foot
- ④ Mounting Type : SMD Type
- ⑤ Row Type : Dual Row
- ⑥ Circuits No.
- ⑦ Insulator Material : 4 : Nylon6T, UL 94-V0
- ⑧ Color : NL : Natural(Beige)
- ⑨ Contact Plating : Tin-plated
- ⑩ Soldering Tab : Tin-plated

Specification :

Current Rating :	2A AC,DC
Voltage Rating :	250V AC,DC
Temperature Range :	-25°C ~ +85°C
Contact Resistance :	30mΩ Max.
Insulation Resistance :	1000mΩ Min.
Withstanding Voltage :	800V AC/minute
Pin Material :	Brass
Soldering Tab	Brass
Insulator Material :	Nylon6T, UL 94-V0

Ordering Information & Dimension

Circuit NO.	Dimensions		
	A	B	C
04	2.00	8.50	4.00
06	4.00	10.50	6.00
08	6.00	12.50	8.00
10	8.00	14.50	10.00
12	10.00	16.50	12.00
14	12.00	18.50	14.00
16	14.00	20.50	16.00
18	16.00	22.50	18.00
20	18.00	24.50	20.00
22	20.00	26.50	22.00
24	22.00	28.50	24.00
26	24.00	30.50	26.00
28	26.00	32.50	28.00
30	28.00	34.50	30.00
32	30.00	36.50	32.00
34	32.00	38.50	34.00
36	34.00	40.50	36.00
38	36.00	42.50	38.00
40	38.00	44.50	40.00

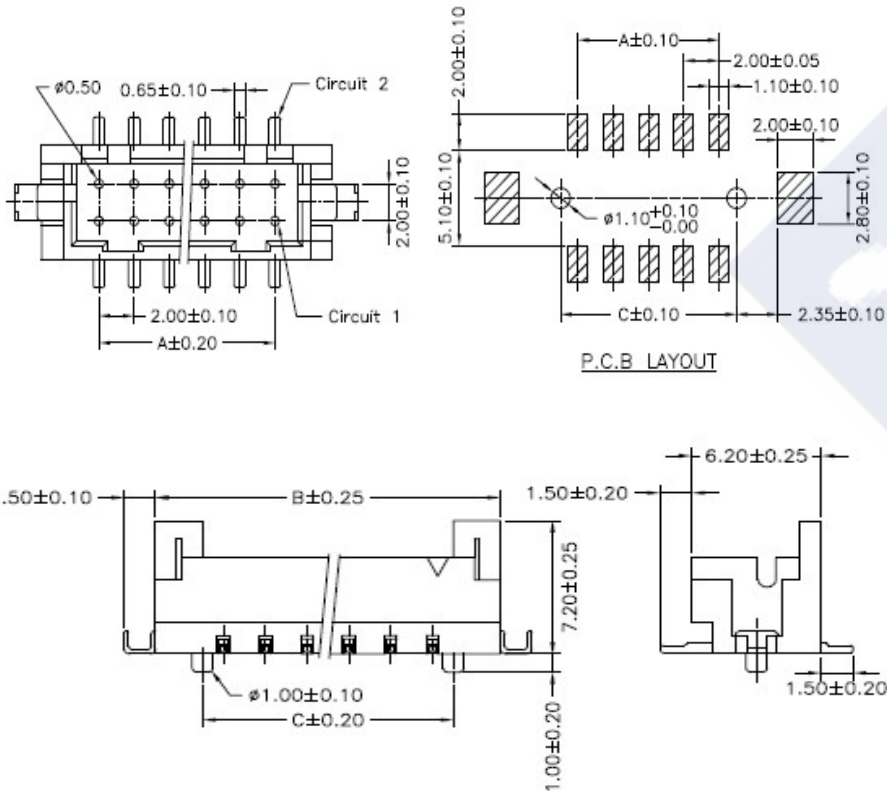

DESCRIPTION :
2.00mm Pitch,
Receptacle, Dual Row, SMD,
Straight Angle, With Foot

PART NO. :
2211JVFS DXX-4NL0

GENERAL TOLERANCE

X.X ± 0.25
 X.XX ± 0.15
 X.XXX ± 0.05

SCALE : Free

