
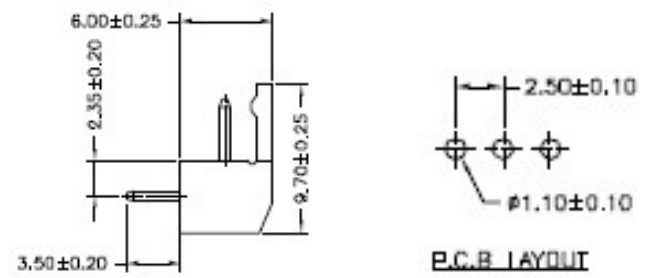


RoHS

Reach

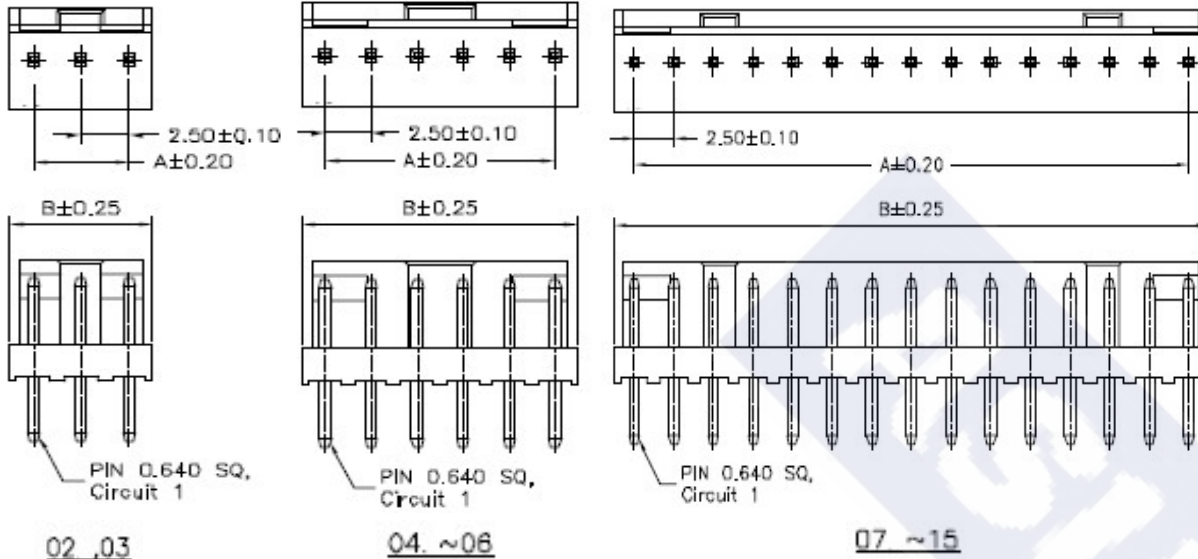

Explanation of PN.

2500J R XX - 3 RD 0

① ② ③ ④ ⑤ ⑥

Ordering Information & Dimension

Circuit NO.	Dimensions	
	A	B
02	2.50	5.00
03	5.00	7.50
04	7.50	10.00
05	10.00	12.50
06	12.50	15.00
07	15.00	17.50
08	17.50	20.00
09	20.00	22.50
10	22.50	25.00
11	25.00	27.50
12	27.50	30.00
13	30.00	32.50
14	32.50	35.00
15	35.00	37.50

- ① Series No.
- ② Connector Type : Right Angle
- ③ Circuits No.
- ④ Insulator Material : 3 : Nylon66, UL 94-V0
- ⑤ Color : RD :Red(153C)
- ⑥ Contact Plating : Tin-plated

Specification :

- Current Rating : 3A AC,DC
- Voltage Rating : 500V AC,DC
- Temperature Range : -25°C ~ +85°C
- Contact Resistance : 20mΩ Max.
- Insulation Resistance : 100mΩ Min.
- Withstanding Voltage : 1500V AC/minute
- Pin Material : Brass
- Insulator Material : Nylon66, UL 94-V0

	DESCRIPTION : 2.50mm Pitch, Receptacle, Single Row, DIP, Right Angle	GENERAL TOLERANCE	
	PART NO. : 2500JRXX-3RD0	X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05	SCALE : Free