


RoHS

Reach

## Ordering Information &amp; Dimension

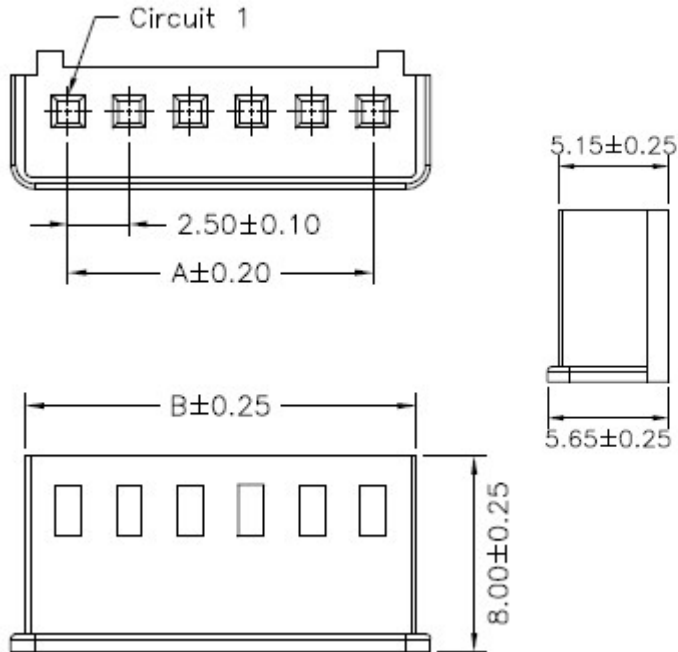

Circuit NO.	Dimensions	
	A	B
02	2.50	6.00
03	5.00	8.50
04	7.50	11.00
05	10.00	13.50
06	12.50	16.00
07	15.00	18.50
08	17.50	21.00
09	20.00	23.50
10	22.50	26.00
11	25.00	28.50
12	27.50	31.00
13	30.00	33.50
14	32.50	36.00
15	35.00	38.50
16	37.50	41.00
17	40.00	43.50
18	42.50	46.00
19	45.00	48.50
20	47.50	51.00

Explanation of PN.


**2503J H XX - 2 NL**

① ② ③ ④ ⑤

- ① Series No.
- ② Connector Type : Housing
- ③ Circuits No.
- ④ Insulator Material : Nylon66, UL 94-V2
- ⑤ Color :NL : Natural(7501C)

Specification :

- Current Rating : 3A AC,DC
- Voltage Rating : 250V AC,DC
- Temperature Range : -25°C ~ +85°C
- Contact Resistance : 10mΩ Max.
- Insulation Resistance : 1000mΩ Min.
- Withstanding Voltage : 800V AC/minute
- Insulator Material : Nylon66, UL 94-V2

	<b>DESCRIPTION :</b> <b>2.50mm Pitch,</b> <b>Housing, Single Row</b>	<b>GENERAL TOLERANCE</b>	
	<b>PART NO. :</b> <b>2503JHXX-2NL</b>	X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05	SCALE : Free 