
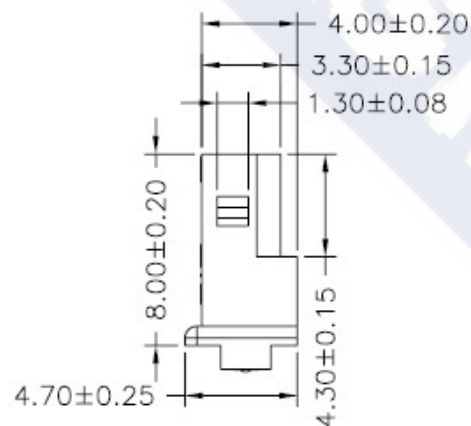


RoHS

Reach

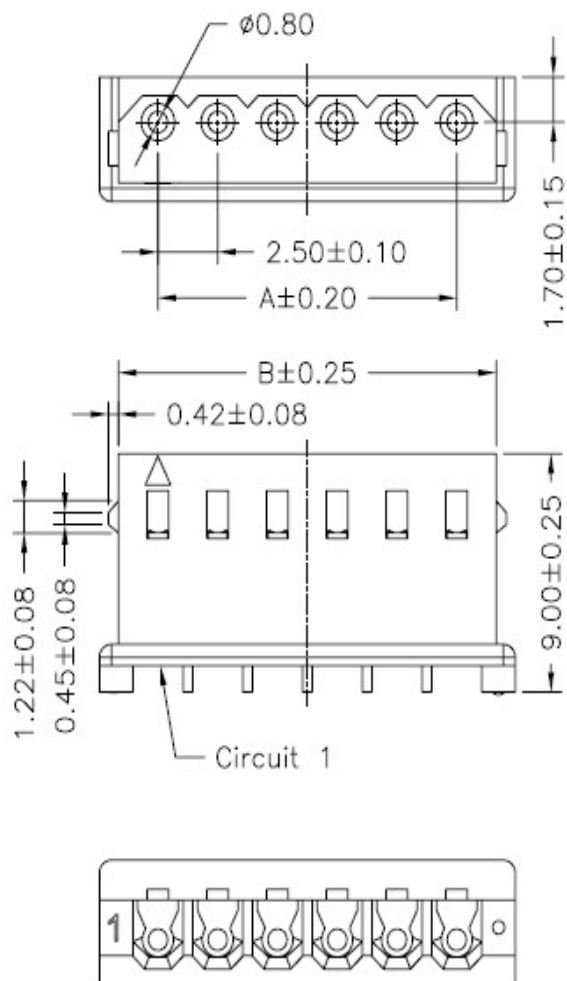

Ordering Information & Dimension

Circuit No.	Dimensions		Circuit No.	Dimensions	
	A	B		A	B
02	2.50	5.80	10	22.50	25.80
03	5.00	8.30	11	25.00	28.30
04	7.50	10.80	12	27.50	30.80
05	10.00	13.30	13	30.00	33.30
06	12.50	15.80	14	32.50	35.80
07	15.00	18.30	15	35.00	38.30
08	17.50	20.80	16	37.50	40.80
09	20.00	23.30			

Explanation of PN.

2506J H XX - X XX

① ② ③ ④ ⑤

- ① Series No.
- ② Connector Type : Housing
- ③ Circuits No.
- ④ Insulator Material : 3 : Nylon66, UL 94-V0  
7 : Nylon66, UL 94-V2(No Flame)
- ⑤ Color : NL : Natural(Beige) -- Nylon66, UL 94-V0  
WH : White -- Nylon66, UL 94-V0  
BK : Black -- Nylon66, UL 94-V0  
NL : Natural (Beige) -- Nylon66, UL 94-V2(No Flame)

Specification :

Current Rating : 3A AC,DC

Voltage Rating : 250V AC,DC

Temperature Range : -25°C ~ +85°C

Contact Resistance : 20mΩ Max.

Insulation Resistance : 1000mΩ Min.

Withstanding Voltage : 1000V AC/minute

Insulator Material : Nylon66, UL 94-V0 or Nylon66, UL 94-V2(No Flame)

	<b>DESCRIPTION :</b> <b>2.50mm Pitch,</b> <b>Housing, Single Row</b>	<b>GENERAL TOLERANCE</b>	
	<b>PART NO. :</b> <b>2506JHXX-XXX</b>	X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05	SCALE : Free 