
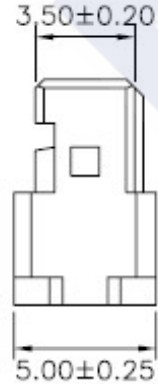


RoHS

Reach

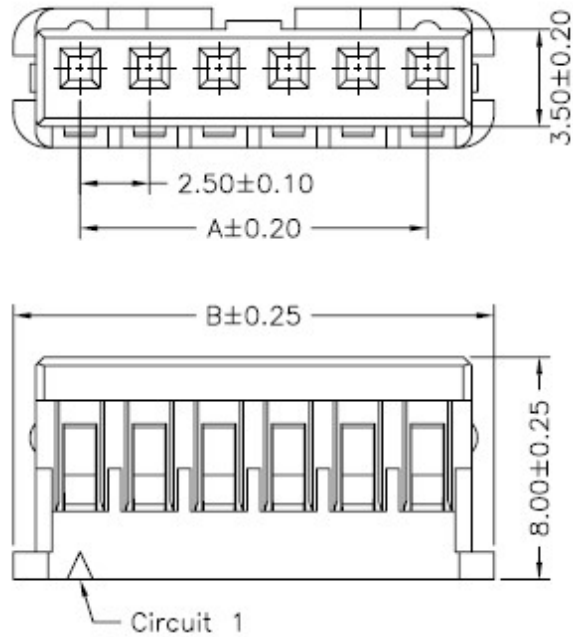

Ordering Information & Dimension

Circuit No.	Dimensions		Circuit No.	Dimensions	
	A	B		A	B
02	2.50	7.30	09	16.50	24.80
03	4.50	9.80	10	18.50	27.30
04	6.50	12.30	11	20.50	29.80
05	8.50	14.80	12	22.50	32.30
06	10.50	17.30	13	24.50	34.80
07	12.50	19.80	14	26.50	37.30
08	14.50	22.30	15	28.50	39.80

Explanation of PN.

2507J H XX - 3 BK

① ② ③ ④ ⑤

- ① Series No.
- ② Connector Type : Housing
- ③ Circuits No.
- ④ Insulator Material : 3 : Nylon66, UL 94-V0
- ⑤ Color : BK : Black

Specification :

Current Rating : 3A AC,DC

Voltage Rating : 500V AC,DC

Temperature Range : -25°C ~ +85°C

Contact Resistance : 20mΩ Max.

Insulation Resistance : 500mΩ Min.

Withstanding Voltage : 1000V AC/minute

Insulator Material : Nylon66, UL 94-V0

DESCRIPTION :
2.50mm Pitch,
Housing, Single Row

PART NO. :
2507JHXX-3BK

GENERAL TOLERANCE

SCALE : Free

X.X ± 0.25
 X.XX ± 0.15
 X.XXX ± 0.05

