

RoHS

Reach

Explanation of PN.

**2540J H XX - 3 WH**

① ② ③ ④ ⑤

- ① Series No.
- ② Connector Type : Housing
- ③ Circuits No.
- ④ Insulator Material : 3 : Nylon66, UL 94-V0
- ⑤ Color : WH : White

## Ordering Information &amp; Dimension

Circuit No.	Dimensions		
	A	B	C
02	2.50	7.25	5.90
03	5.00	9.75	8.40
04	7.50	12.25	10.90
05	10.00	14.75	13.40
06	12.50	17.25	15.90
07	15.00	19.75	18.40
08	17.50	22.25	20.90
09	20.00	24.75	23.40
10	22.50	27.25	25.90
11	25.00	29.75	28.40
12	27.50	32.25	30.90
13	30.00	34.75	33.40
14	32.50	37.25	35.90
15	35.00	39.75	38.40

Specification :

Current Rating : 3A AC,DC

Voltage Rating : 250V AC,DC

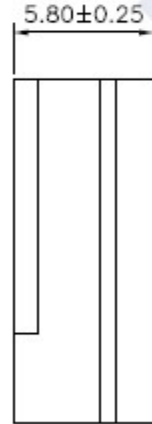
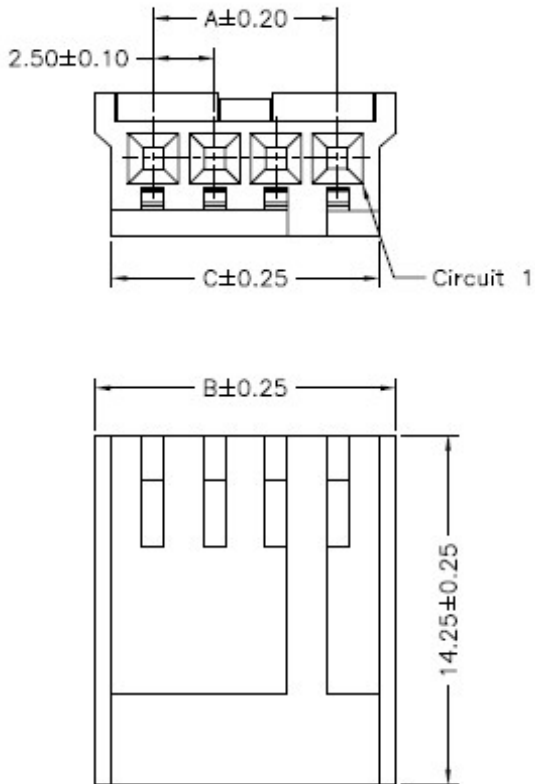
Temperature Range : -25°C ~ +85°C

Contact Resistance : 10mΩ Max.

Insulation Resistance : 500mΩ Min.

Withstanding Voltage : 800V AC/minute

Insulator Material : Nylon66, UL 94-V0 or


**ASIAS** ASIAS TECHNOLOGY CO.,LTD.

**DESCRIPTION :**  
**2.50mm Pitch,**  
**Housing, Single Row**
**PART NO. :**  
**2540JHXX-3WH**
**GENERAL TOLERANCE**
X.X ± 0.25  
X.XX ± 0.15  
X.XXX ± 0.05

SCALE : Free

