

RoHS

Reach


Explanation of PN.

2540J V A XX - 3 WH 0

① ② ③ ④ ⑤ ⑥ ⑦

Ordering Information & Dimension

- ① Series No.
 ② Connector Type : Straight Angle
 ③ Option Type : A Type
 ④ Circuits No.
 ⑤ Insulator Material : 3 : Nylon66, UL 94-V0
 ⑥ Color : WH : White
 ⑦ Contact Plating : 0 : Tin-plated

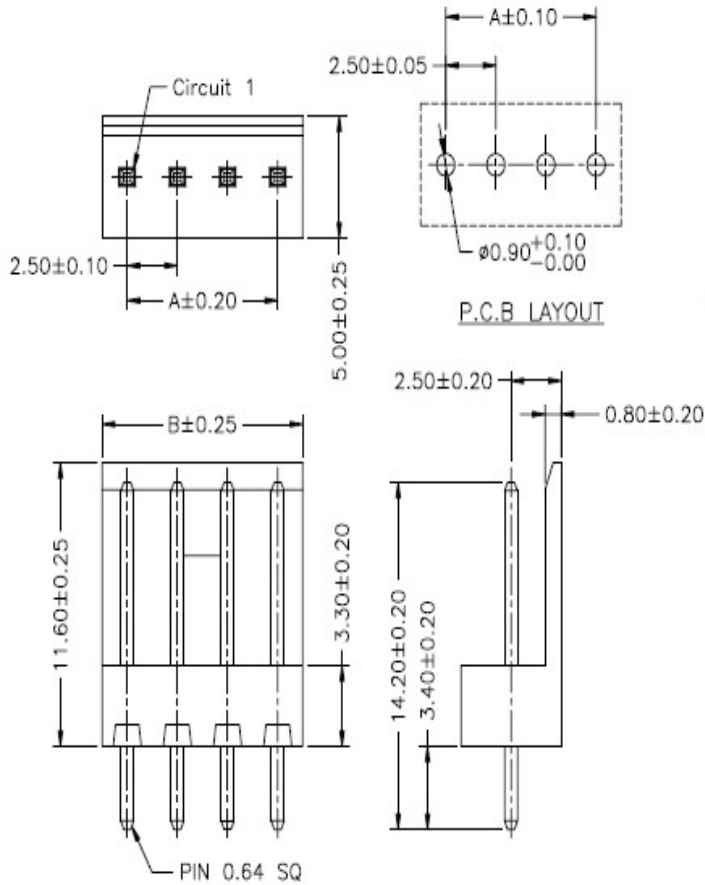

Circuit NO.	Dimensions	
	A	B
02	2.50	5.00
03	5.00	7.50
04	7.50	10.00
05	10.00	12.50
06	12.50	15.00
07	15.00	17.50
08	17.50	20.00
09	20.00	22.50
10	22.50	25.00
11	25.00	27.50
12	27.50	30.00
13	30.00	32.50
14	32.50	35.00
15	35.00	37.50

Specification :

Current Rating : 3A AC,DC

Voltage Rating : 250V AC,DC

Temperature Range : $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$ Contact Resistance : $10\text{m}\Omega$ Max.Insulation Resistance : $500\text{m}\Omega$ Min.

Withstanding Voltage : 800V AC/minute

Pin Material : Brass

Insulator Material : Nylon66, UL 94-V0

DESCRIPTION :
 2.50mm Pitch,
 Receptacle, Single Row, DIP,
 Straight Angle, A Type

PART NO. :
 2540JVAXX-3WH0

GENERAL TOLERANCE

X.X ± 0.25
 X.XX ± 0.15
 X.XXX ± 0.05

SCALE : Free

