

RoHS

Reach

Explanation of PN.

2540J V XX - 3 WH 0

① ② ③ ④ ⑤ ⑥

- ① Series No.  
 ② Connector Type : Straight Angle  
 ③ Circuits No.  
 ④ Insulator Material : 3 : Nylon66, UL 94-V0  
 ⑤ Color : WH : White  
 ⑥ Contact Plating : 0 : Tin-plated

## Ordering Information &amp; Dimension

Circuit NO.	Dimensions	
	A	B
02	2.50	5.00
03	5.00	7.50
04	7.50	10.00
05	10.00	12.50
06	12.50	15.00
07	15.00	17.50
08	17.50	20.00
09	20.00	22.50
10	22.50	25.00
11	25.00	27.50
12	27.50	30.00
13	30.00	32.50
14	32.50	35.00
15	35.00	37.50

Specification :

Current Rating : 3A AC,DC

Voltage Rating : 250V AC,DC

Temperature Range : -25°C ~ +85°C


Contact Resistance : 10mΩ Max.

Insulation Resistance : 500mΩ Min.

Withstanding Voltage : 800V AC/minute

Pin Material : Brass

Insulator Material : Nylon66, UL 94-V0

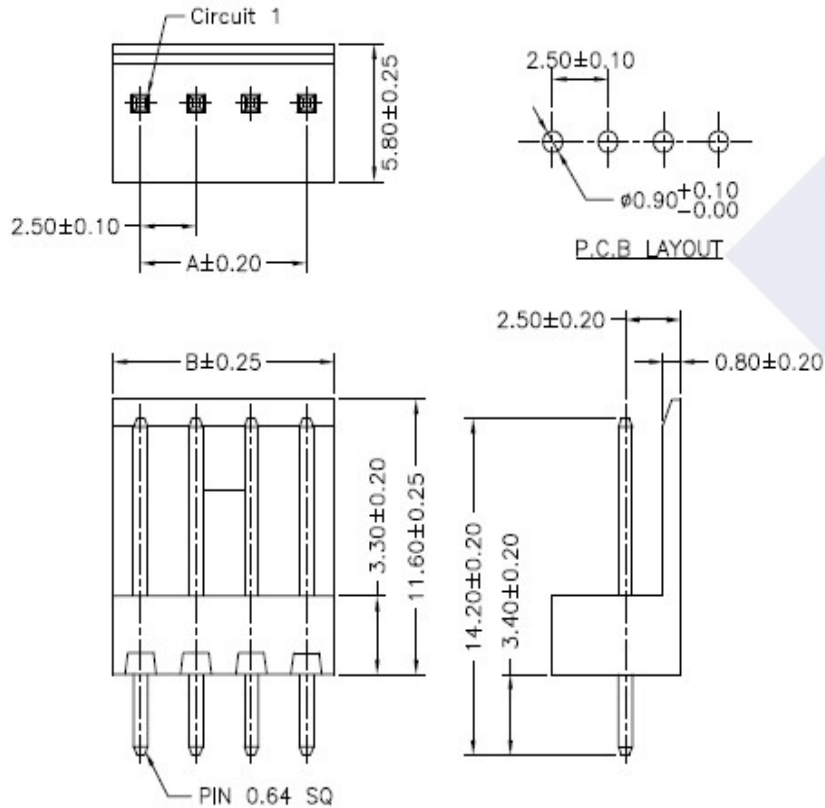

**DESCRIPTION :**  
 2.50mm Pitch,  
 Receptacle, Single Row, DIP,  
 Straight Angle

**PART NO. :**  
 2540JVXX-3WH0

**GENERAL TOLERANCE**

X.X ± 0.25  
 X.XX ± 0.15  
 X.XXX ± 0.05

SCALE : Free

