



RoHS

Reach

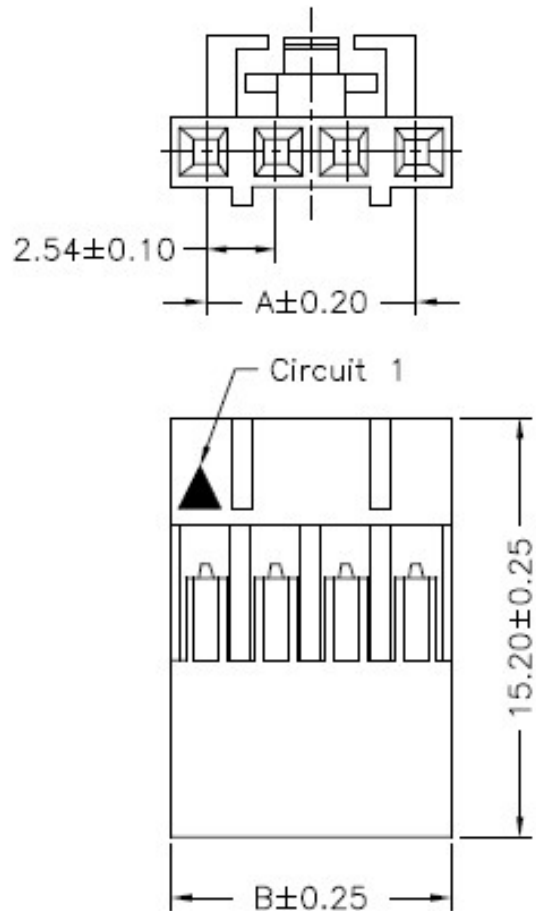

Ordering Information & Dimension

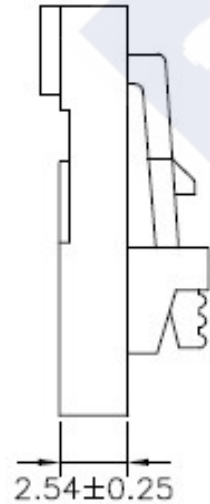

Circuit NO.	Dimensions	
	A	B
02	2.54	5.08
03	5.08	7.62
04	7.62	10.16
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48

Explanation of PN.


2541J H XX - 0 BK

① ② ③ ④ ⑤

- ① Series No.
- ② Connector Type : Housing
- ③ Circuits No.
- ④ Insulator Material : 0 : PBT+GF, UL 94-V0
- ⑤ Color : BK : Black

Specification :

- Current Rating : 3A AC,DC
- Voltage Rating : 250V AC,DC
- Temperature Range : -25°C ~ +85°C
- Contact Resistance : 20mΩ Max.
- Insulation Resistance : 1000mΩ Min.
- Withstanding Voltage : 1500V AC/minute
- Insulator Material : PBT+GF, UL 94-V0

	DESCRIPTION : 2.54mm Pitch, Housing, Single Row, With Lock	GENERAL TOLERANCE	
	PART NO. : 2541JHXX-0BK	X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05	SCALE : Free 