

RoHS

Reach

Explanation of PN.

**2542J V B XX - 3 WH 0**

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Connector Type : Straight Angle
- ③ Option Type : B Type
- ④ Circuits No.
- ④ Insulator Material : 3 : Nylon66, UL 94-V0
- ⑥ Color : WH : White
- ⑦ Contact Plating : 0 : Tin-plated

## Ordering Information &amp; Dimension

Circuit No.	Dimensions	
	A	B
02	2.54	5.08
03	5.08	7.62

Specification :

Current Rating : 4A AC,DC

Voltage Rating : 250V AC,DC

Temperature Range : -25°C ~ +85°C


Contact Resistance : 10mΩ Max.


Insulation Resistance : 1000mΩ Min.

Withstanding Voltage : 1000V AC/minute

Pin Material : Brass

Insulator Material : Nylon66, UL 94-V0

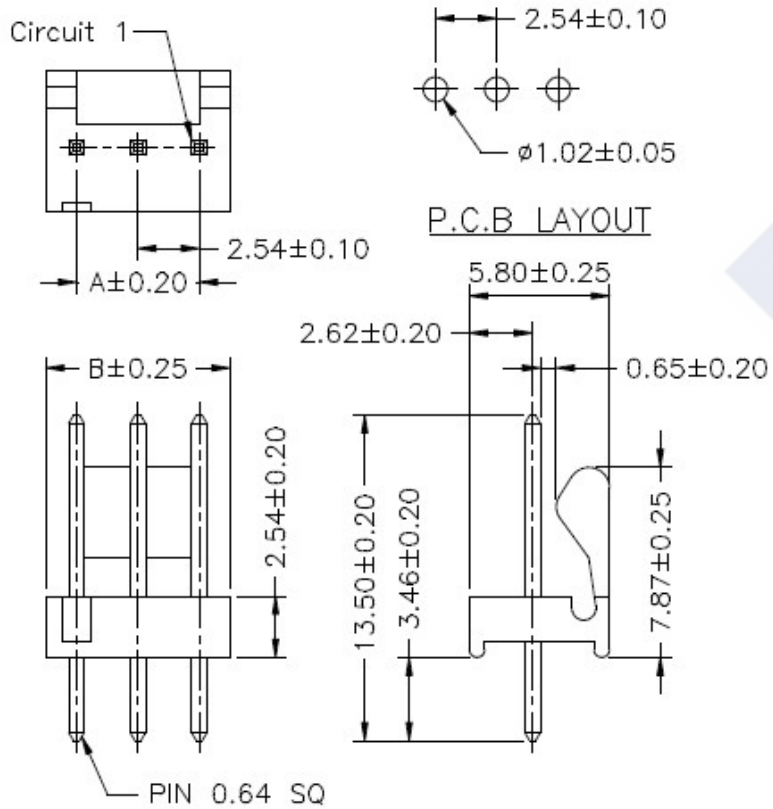

	<b>DESCRIPTION :</b> 2.54mm Pitch, Receptacle, Single Row, DIP, Straight Angle, B Type	<b>GENERAL TOLERANCE</b>	
	<b>PART NO. :</b> 2542JVBXX-3WH0	X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05	SCALE : Free 