
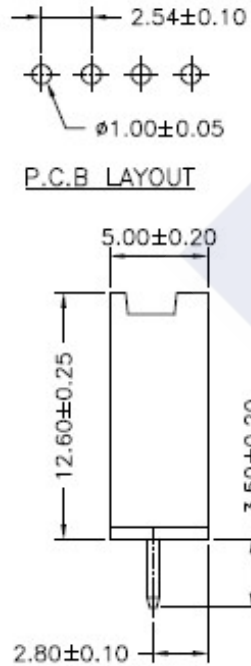


RoHS

Reach

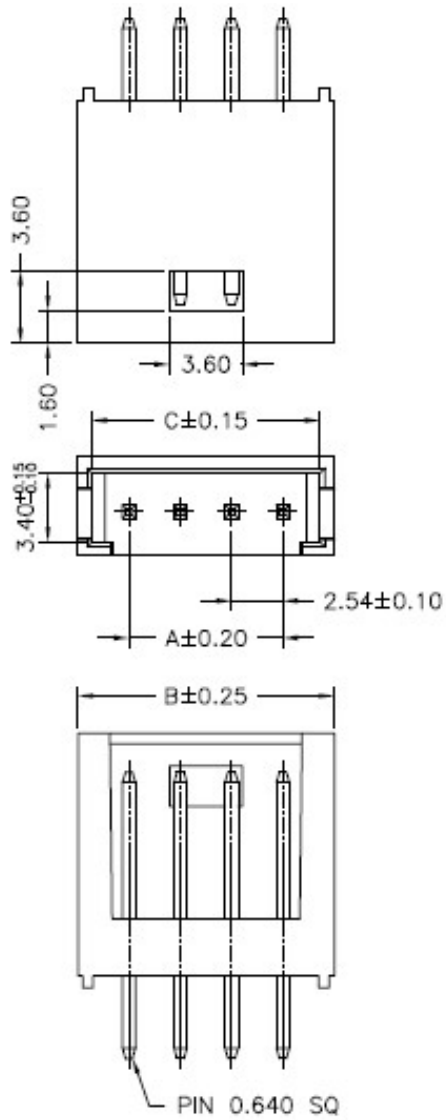

Ordering Information & Dimension

Circuit NO.	Dimensions		
	A	B	C
02	2.54	7.62	6.22
04	7.62	12.70	11.30
05	10.16	15.24	13.84
06	12.70	17.78	16.38
08	17.78	22.86	21.46
10	22.86	27.94	26.54

Explanation of PN.

**2543J V XX - 0 BK 0**

①      ②      ③      ④      ⑤      ⑥

- ① Series No.
- ② Connector Type : Straight Angle
- ③ Circuits No.
- ④ Insulator Material : 0 : PBT, UL 94-V0
- ⑤ Color : BK : Black
- ⑥ Contact Plating : 0 : Tin-plated

Specification :

- Current Rating : 3A AC,DC
- Voltage Rating : 250V AC,DC
- Temperature Range : -25°C ~ +85°C
- Contact Resistance : 20mΩ Max.
- Insulation Resistance : 1000mΩ Min.
- Withstanding Voltage : 1000V AC/minute
- Pin Material : Brass
- Insulator Material : PBT, UL 94-V0

	<b>DESCRIPTION :</b> 2.54mm Pitch, Receptacle, Single Row, DIP, Straight Angle	<b>GENERAL TOLERANCE</b>	
	<b>PART NO. :</b> 2543JVXX-0BK0	X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05	SCALE : Free  