

RoHS

Reach

Explanation of PN.

**2545J R XX - 0 BK 2**

① ② ③ ④ ⑤ ⑥




- ① Series No.
- ② Connector Type : Right Type
- ③ Circuits No.
- ④ Insulator Material : 0 : PBT+GF, UL 94-V0
- ⑤ Color : BK : Black
- ⑥ Contact Plating : 2 : Gold-flash

Ordering Information & Dimension

Circuit No.	Dimensions		Circuit No.	Dimensions	
	A	B		A	B
02	2.54	5.08	22	53.34	55.88
03	5.08	7.62	23	55.88	58.42
04	7.62	10.16	24	58.42	60.96
05	10.16	12.70	25	60.96	63.50
06	12.70	15.24	26	63.50	66.04
07	15.24	17.78	27	66.04	68.58
08	17.78	20.32	28	68.58	71.12
09	20.32	22.86	29	71.12	73.66
10	22.86	25.40	30	73.66	76.20
11	25.40	27.94	31	76.20	78.74
12	27.94	30.48	32	78.74	81.28
13	30.48	33.02	33	81.28	83.82
14	33.02	35.56	34	83.82	86.36
15	35.56	38.10	35	86.36	88.90
16	38.10	40.64	36	88.90	91.44
17	40.64	43.18	37	91.44	93.98
18	43.18	45.72	38	93.98	96.52
19	45.72	48.26	39	96.52	99.06
20	48.26	50.80	40	99.06	101.60
21	50.80	53.34			

Specification :

- Current Rating : 3A AC,DC
- Voltage Rating : 250V AC,DC
- Temperature Range : -25°C ~ +85°C
- Contact Resistance : 20mΩ Max.
- Insulation Resistance : 1000mΩ Min.
- Withstanding Voltage : 1500V AC/minute
- Insulator Material : PBT+GF, UL 94-V0

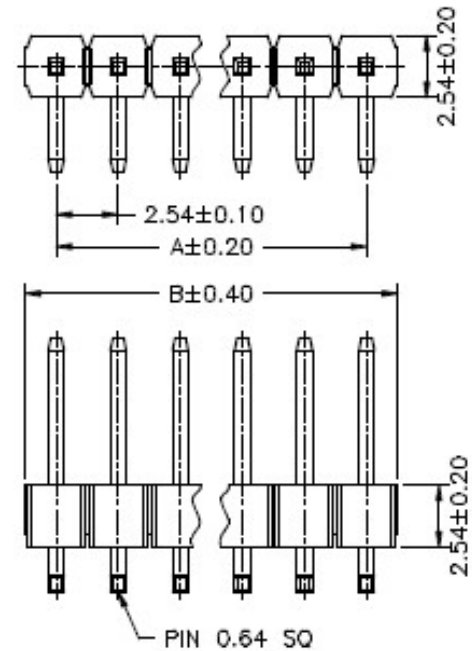

	<b>DESCRIPTION :</b> <b>2.54mm Pitch,</b> <b>Pin Header, Single Row, DIP,</b> <b>Right Type</b>	<b>GENERAL TOLERANCE</b>	
	<b>PART NO. :</b> <b>2545JRXX-0BK2</b>	X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05	SCALE : Free  