

RoHS

Reach

Explanation of PN.

2548J R D XX - X BK 2

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
 ② Connector Type : Right Type
 ③ Row Type : Dual Row
 ④ Circuits No.
 ⑤ Insulator Material : 0 : PBT+GF, UL 94-V0
 4 : Nylon6T, UL 94-V0
 ⑥ Color : BK : Black
 ⑦ Contact Plating : 2 : Gold-flash

Specification :

Current Rating : 3A AC,DC

Voltage Rating : 250V AC,DC

Temperature Range : -25°C ~ +85°C

Contact Resistance : 20mΩ Max.

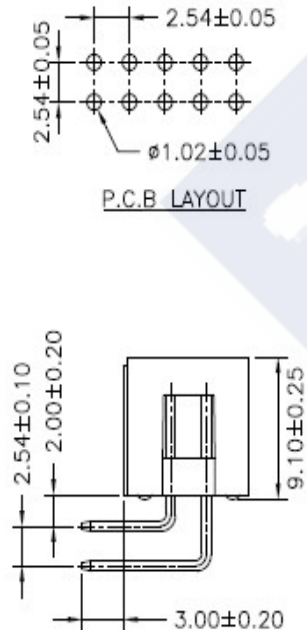
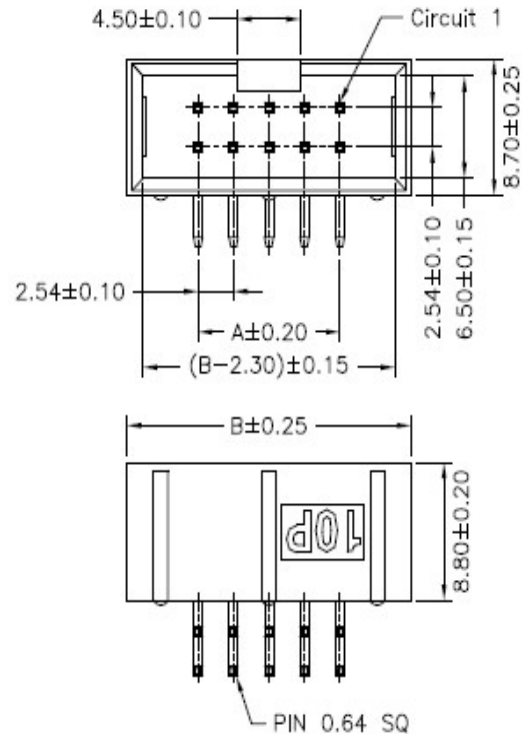
Insulation Resistance : 1000mΩ Min.

Withstanding Voltage : 1500V AC/minute

Insulator Material : PBT+GF, UL 94-V0 or Nylon6T, UL 94-V0

Ordering Information & Dimension

Circuits No.	Dimensions	
	A	B
06	5.08	15.24
08	7.62	17.78
10	10.16	20.32
12	12.70	22.86
14	15.24	25.40
16	17.78	27.94
20	22.86	33.02
24	27.94	38.10
26	30.48	40.64
30	35.56	45.72
34	40.64	50.80
40	48.26	58.42
44	53.34	63.50
48	58.42	68.58
50	60.96	71.12
60	73.66	83.82
62	78.74	88.90


ASIAS ASIAS TECHNOLOGY CO.,LTD.

DESCRIPTION :
**2.54mm Pitch,
 Receptacle, Dual Row, DIP,
 Right Type**

PART NO. :
2548JRDXX-XBK2

GENERAL TOLERANCE

X.X ± 0.25
 X.XX ± 0.15
 X.XXX ± 0.05

SCALE : Free

