



RoHS

Reach

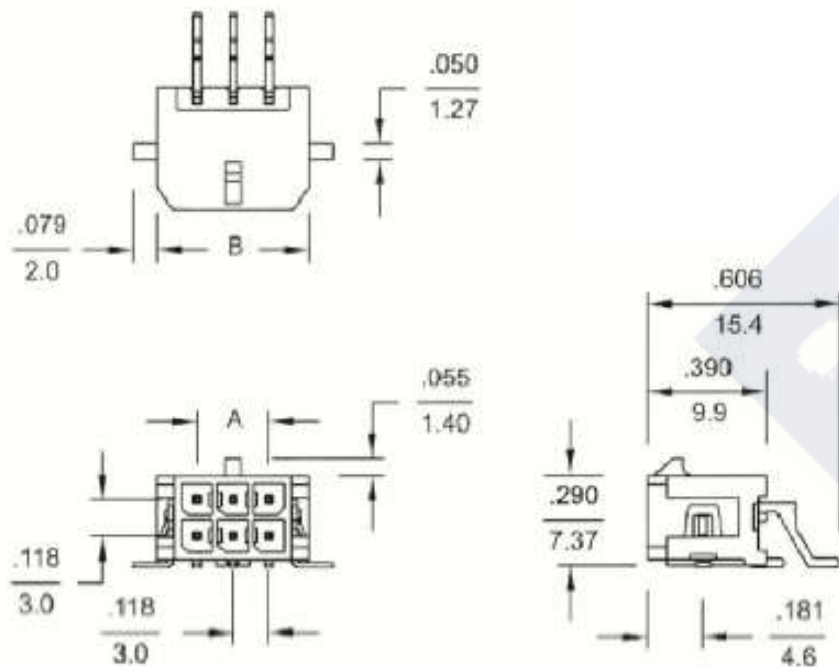

Ordering Information & Dimension

| Circuit NO. | Dimensions |       |
|-------------|------------|-------|
|             | A          | B     |
| 02          | ---        | 6.65  |
| 04          | 3.00       | 9.65  |
| 06          | 6.00       | 12.65 |
| 08          | 9.00       | 15.65 |
| 10          | 12.00      | 18.65 |
| 12          | 15.00      | 21.65 |
| 14          | 18.00      | 24.65 |
| 16          | 21.00      | 27.65 |
| 18          | 24.00      | 30.65 |
| 20          | 27.00      | 33.65 |
| 22          | 30.00      | 36.65 |
| 24          | 33.00      | 39.65 |

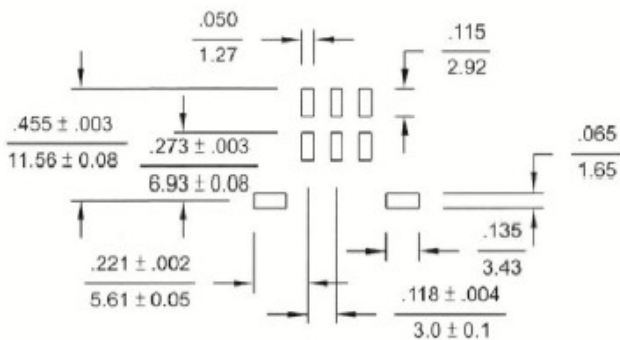

PCB Layout

Explanation of PN.

**3030J R S D XX - 6 BK 0**  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② Connector Type : Right Angle
- ③ Mounting Type : SMD Type
- ④ Row Type : Dual Row
- ⑤ Circuits No.
- ⑥ Insulator Material : 6 : LCP, UL 94-V0
- ⑦ Color : BK : Black
- ⑧ Contact Plating : Tin-plated

Specification :

- Current Rating : 5A AC,DC
- Voltage Rating : 250V AC,DC
- Temperature Range : -25°C ~ +85°C
- Contact Resistance : 10mΩ Max.
- Insulation Resistance : 1000mΩ Min.
- Withstanding Voltage : 1500V AC/minute
- Pin Material : Brass
- Insulator Material : LCP, UL 94-V0

|  |                                                                                                  |                                           |                  |
|--|--------------------------------------------------------------------------------------------------|-------------------------------------------|------------------|
|  | <b>DESCRIPTION :</b><br>3.00mm Pitch,<br>Receptacle, Dual Row, SMD,<br>Right Angle, Without Foot | <b>GENERAL TOLERANCE</b>                  |                  |
|  | <b>PART NO. :</b><br><b>3030JRS DXX-6BK0</b>                                                     | X.X ± 0.25<br>X.XX ± 0.15<br>X.XXX ± 0.05 | SCALE : Free<br> |