

RoHS


Reach

Explanation of PN.

3030J V S D XX - 6 BK 0

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② Connector Type : Straight Angle
- ③ Mounting Type : SMD Type
- ④ Row Type : Dual Row
- ⑤ Circuits No.
- ⑥ Insulator Material : 6 : LCP, UL 94-V0
- ⑦ Color : BK : Black
- ⑧ Contact Plating : Tin-plated



Ordering Information & Dimension

Circuit NO.	Dimensions	
	A	B
02	---	6.65
04	3.00	9.65
06	6.00	12.65
08	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

Specification :

Current Rating : 5A AC,DC

Voltage Rating : 250V AC,DC

Temperature Range : -25°C ~ +85°C


Contact Resistance : 10mΩ Max.

Insulation Resistance : 1000mΩ Min.

Withstanding Voltage : 1500V AC/minute

Pin Material : Brass

Insulator Material : LCP, UL 94-V0

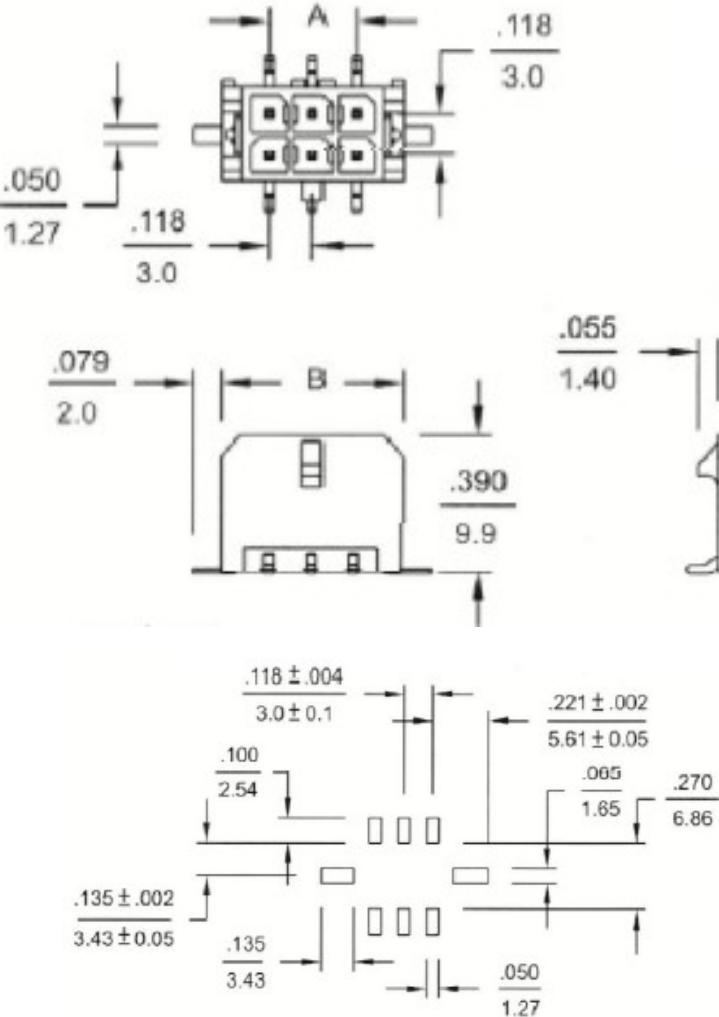

PCB Layout



**DESCRIPTION :**  
 3.00mm Pitch,  
 Receptacle, Dual Row, SMD,  
 Straight Angle, Without Foot

**PART NO. :**  
 3030JVSDXX-6BK0

**GENERAL TOLERANCE**

X.X ± 0.25  
 X.XX ± 0.15  
 X.XXX ± 0.05

SCALE : Free

