
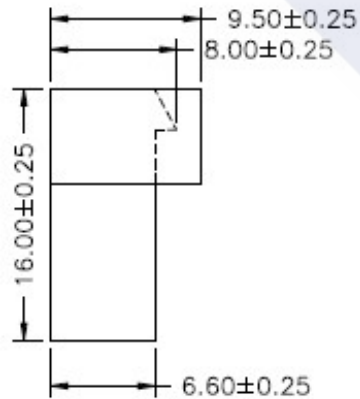


RoHS

Reach

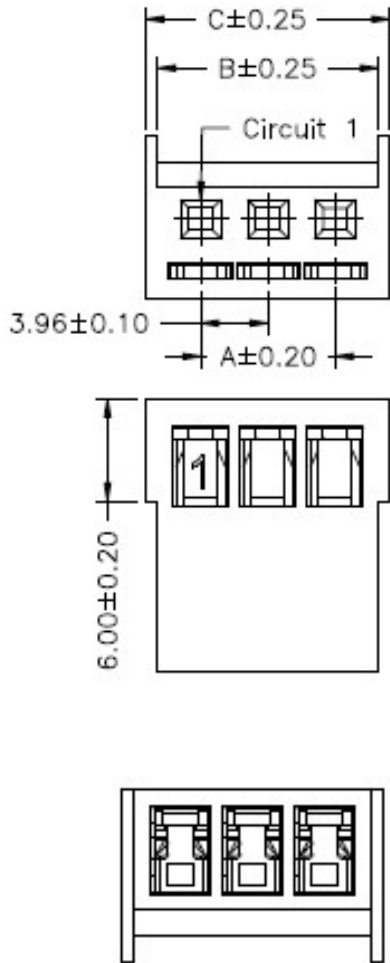

Ordering Information & Dimension

PART NO.	Dimensions		
	A	B	C
02	3.96	9.06	10.43
03	7.92	13.02	14.39
04	11.88	16.98	18.35
05	15.84	20.94	22.31
06	19.80	24.90	26.27
07	23.76	28.86	30.23
08	27.72	32.82	34.19
09	31.68	36.78	38.15
10	35.64	40.74	42.11
11	39.60	44.70	46.07
12	43.56	48.66	50.03

Explanation of PN.

3962J H A XX - X NL

① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Connector Type : Housing
- ③ Option Type : A Type
- ④ Circuits No.
- ⑤ Insulator Material : 2 : Nylon66, UL 94-V2
7 : Nylon66, UL 94-V2(No Flame)
- ⑥ Color : NL : Natural (Translucent) -- Nylon66, UL 94-V2
NL : Natural (Beige) -- Nylon66, UL 94-V2(No Flame)

Specification :

Current Rating : 7A AC,DC

Voltage Rating : 250V AC,DC


Temperature Range : -25°C ~ +85°C

Contact Resistance : 10mΩ Max.

Insulation Resistance : 1000mΩ Min.

Withstanding Voltage : 1500V AC/minute

Insulator Material : Nylon66, UL 94-V2 or Nylon66, UL 94-V2(No Flame)

	DESCRIPTION : 3.96mm Pitch, Housing, Single Row, A Type	GENERAL TOLERANCE	
	PART NO. : 3962JHAXX-XNL	X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05	SCALE : Free 