


RoHS

Reach

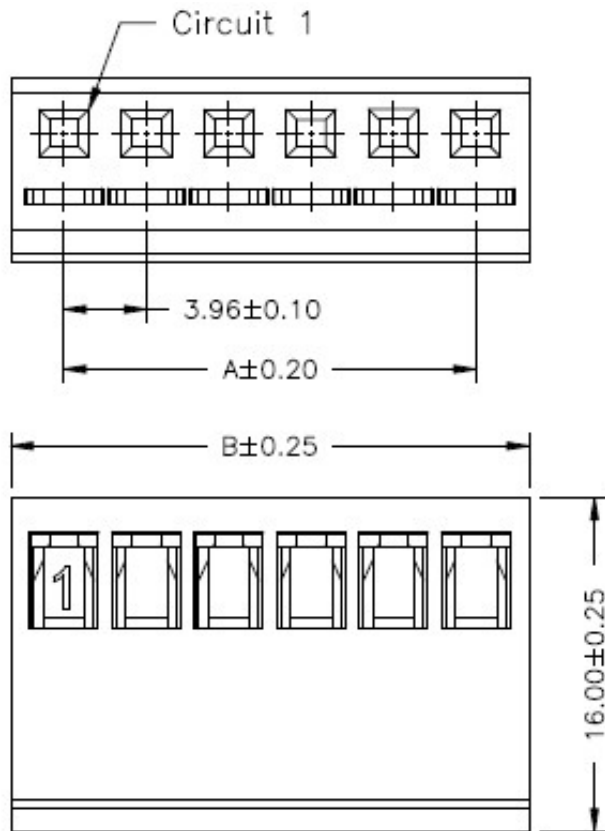

Ordering Information & Dimension

Circuit No.	Dimensions	
	A	B
02	3.96	9.06
03	7.92	13.02
04	11.88	16.98
05	15.84	20.94
06	19.80	24.90
07	23.76	28.86
08	27.72	32.82
09	31.68	36.78
10	35.64	40.74
11	39.60	44.70
12	43.56	48.66

Explanation of PN.

3962J H XX - X NL

① ② ③ ④ ⑤

- ① Series No.
- ② Connector Type : Housing
- ③ Circuits No.
- ④ Insulator Material : 2 : Nylon66, UL 94-V2
7 : Nylon66, UL 94-V2(No Flame)
- ⑤ Color : NL : Natural (Translucent) -- Nylon66, UL 94-V2
NL : Natural (Beige) -- Nylon66, UL 94-V2(No Flame)

Specification :

Current Rating : 7A AC,DC

Voltage Rating : 250V AC,DC

Temperature Range : -25°C ~ +85°C

Contact Resistance : 10mΩ Max.

Insulation Resistance : 1000mΩ Min.

Withstanding Voltage : 1500V AC/minute

Insulator Material : Nylon66, UL 94-V2 or
Nylon66, UL 94-V2(No Flame)

DESCRIPTION :
3.96mm Pitch,
Housing, Single Row

PART NO. :
3962JHXX-XNL

GENERAL TOLERANCE

X.X ± 0.25
 X.XX ± 0.15
 X.XXX ± 0.05

SCALE : Free

