

Explanation of PN.

4255J V A D XX - X XX 0

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② Connector Type : Straight Angle
- ③ Option Type : A Type
- ④ Row Type : Dual Row
- ⑤ Circuits No.
- ⑥ Insulator Material : 1 : Nylon46, UL 94-V0
2 : Nylon66, UL 94-V2
3 : Nylon66, UL 94-V0
7 : Nylon66, UL 94-V2(No Flame)
- ⑦ Color : NL : Natural (Beige) – Nylon46, UL 94-V0
NL : Natural (Translucent) -- Nylon66, UL 94-V2
WH : White -- Nylon66, UL 94-V0
NL : Natural (Beige) -- Nylon66, UL 94-V2(No Flame)
- ⑧ Contact Plating : Tin-plated

Specification :



- Current Rating : 9A AC,DC
- Voltage Rating : 600V AC,DC
- Temperature Range : -25°C ~ +85°C
- Contact Resistance : 10mΩ Max.
- Insulation Resistance : 1000mΩ Min.
- Withstanding Voltage : 1500V AC/minute
- Pin Material : Brass
- Insulator Material : Nylon46, UL 94-V0 or Nylon66, UL 94-V2
Nylon66, UL 94-V0 or
Nylon66, UL 94-V2(No Flame)

RoHS

Reach

Ordering Information & Dimension

Circuits No.	Dimensions	
	A	B
02	---	5.40
04	4.20	9.60
06	8.40	13.80
08	12.60	18.00
10	16.80	22.20
12	21.00	26.40
14	25.20	30.60
16	29.40	34.80
18	33.60	39.00
20	37.80	43.20
22	42.00	47.40
24	46.20	51.60

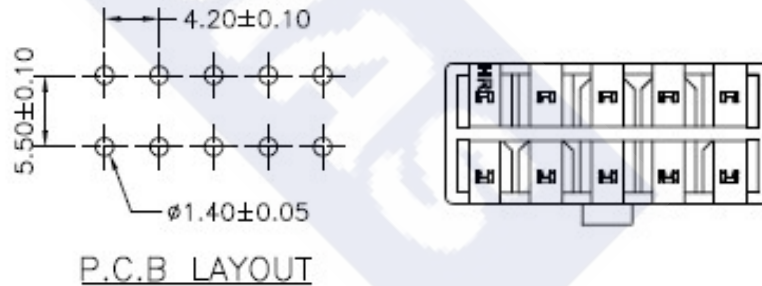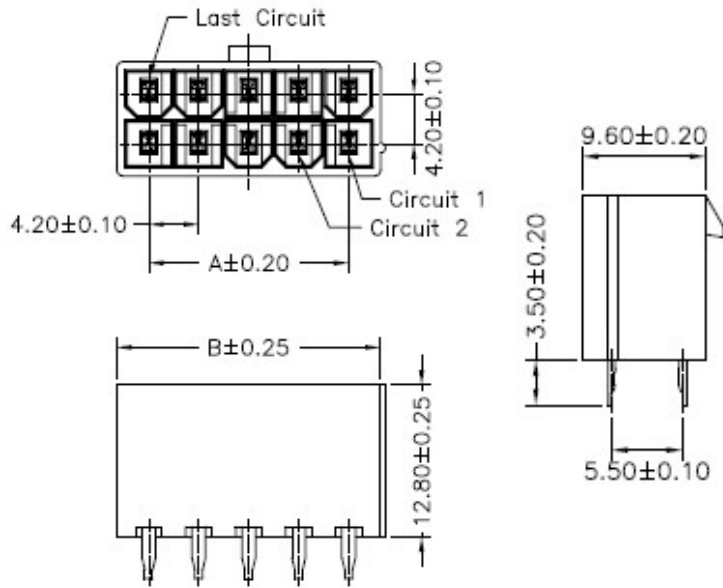

	DESCRIPTION : 4.20mm Pitch, Receptacle, Dual Row, DIP, Straight Angle, A Type	GENERAL TOLERANCE	
	PART NO. : 4255JVADXX-XXX0	X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05	SCALE : Free