
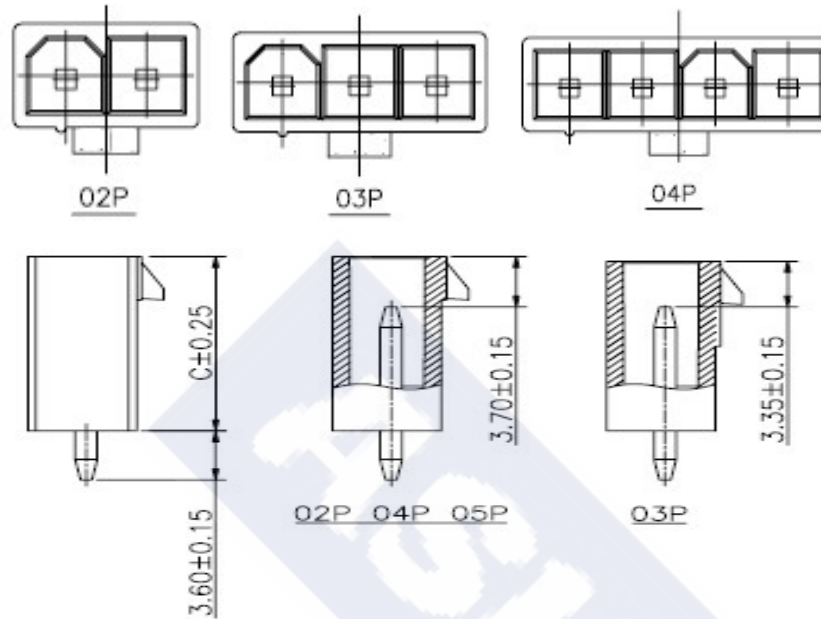


RoHS

Reach

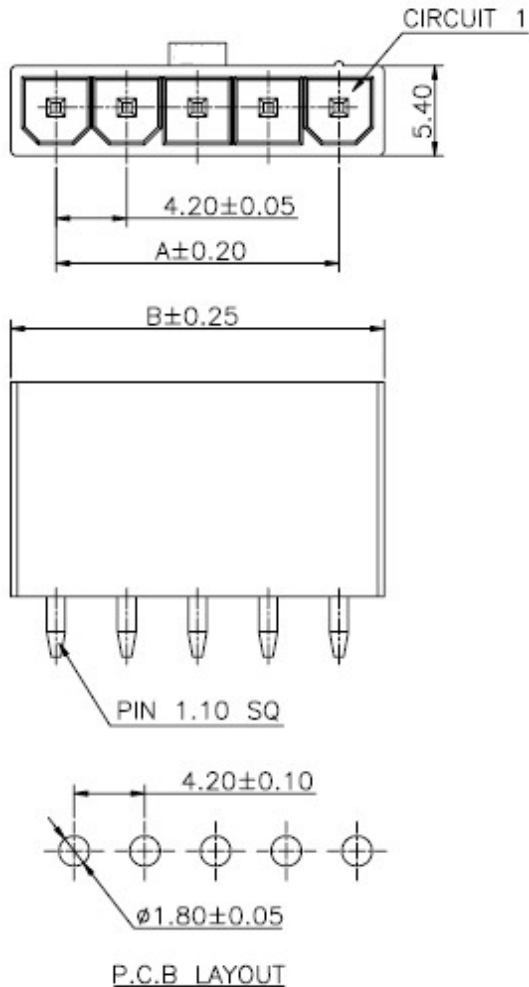

Ordering Information & Dimension

Circuit No.	Dimensions		
	A	B	C
02	4.20	9.60	12.80
03	8.40	13.80	12.45
04	12.60	18.00	12.80
05	22.20	22.20	22.80

Explanation of PN.

4255J V XX - X NL 0

① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Connector Type : Straight Angle
- ③ Circuits No.
- ④ Insulator Material : 2 : Nylon66, UL 94-V2  
7 : Nylon66, UL 94-V2(No Flame)
- ⑤ Color : NL : Natural (Translucent) -- Nylon66, UL 94-V2  
NL : Natural (Beige) -- Nylon66, UL 94-V2(No Flame)
- ⑥ Contact Plating : Tin-plated

Specification :

- Current Rating : 9A AC,DC
- Voltage Rating : 600V AC,DC
- Temperature Range : -25°C ~ +85°C
- Contact Resistance : 10mΩ Max.
- Insulation Resistance : 1000mΩ Min.
- Withstanding Voltage : 1500V AC/minute
- Pin Material : Brass
- Insulator Material : Nylon66, UL 94-V2 or Nylon66, UL 94-V2(No Flame)

	<b>DESCRIPTION :</b> 4.20mm Pitch, Receptacle, Single Row, DIP, Straight Angle	<b>GENERAL TOLERANCE</b>	
	<b>PART NO. :</b> 4255JVXX-XNL0	X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05	SCALE : Free  